STA-LOK®

Marine Rigging Hardware

USA 2022 Price List

> RELIABILITY AND ENDURANCE ARE AT THE FOREFRONT OF EVERYTHING WE DO.

ISO 9001 ISOQAR REGISTERED
Cert No. 12888

Sta-Lok Self-Fit Terminals 08
Sta-Lok Insulators 24
Sta-Lok Swage Terminals 28
Sta-Lok Bronze Turnbuckles 38
Sta-Lok Supajust Turnbuckles 42
Sta-Lok Threaded End Fittings 46
Marine Toggles 54
Sta-Lok Guard Rails & Life Line Fittings 56
Other Products & Accessories 64

FOR THE MOST BEAUTIFUL BOATS CHOOSE STA-LOK.

Sta-Lok have been supplying the global marine industry for more than 49 years after first introducing our products at the International London Boat show in 1973.

Our products are designed with safety in mind, manufactured using high specification stainless steels, selected for their strength and corrosion resistance.

Our dedication to design, manufacturing and customer service means reliability and endurance are at the forefront of everything we do. After all, our products must stand up to the most challenging of climatic conditions.

We are proud to be ISO 9001 accredited, re-enforcing our passion for quality through our entire company and our product range.

Today, our extensive range of fittings and wire rope makes Sta-Lok the preferred choice for professionals and sail boat owners alike.

TO MAKE
VISIONS REALITY
CHOOSE STA-LOK.

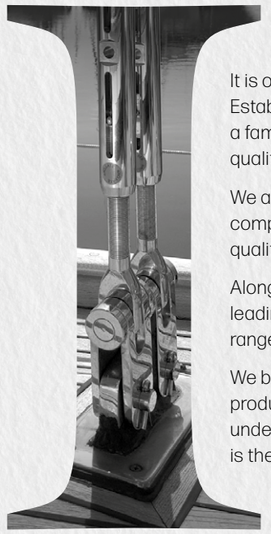

It is our heritage which is the source of our continued inspiration. Established by my father, Ivor Barfield in 1973, Sta-Lok remains a family run business, where exceptional customer service and quality are engrained into our company culture.

We are proud to have retained our roots as a UK manufacturing company, with all of our products manufactured to the highest quality standards at our facility in Essex, England.

Alongside our manufacturing expertise, we have developed into a leading supplier of stainless steel wire rope, stocking an extensive range of constructions and sizes in multiple reel sizes.

We believe that customer service is an extension of the quality products we produce. Our technical specialists take time to understand the needs of each our clients and we believe this is the starting point for the delivery of excellence.

Terry Barfield

TERRY BARFIELD
Managing Director

Our 2022 Price List

Trade Accounts

Sta-Lok's Marine market is built upon key relationships with riggers, resellers and distributors, forming a global reseller network to support yacht owners worldwide.

If you would like to add Sta-Lok to your product offering, please make contact and our team will be happy to discuss your requirements further.

UK Head Office

+44 (0) 1206 390 773
enquiries@stalok.com
stalok.com

USA Office

910 259 3394
usa@stalok.com

Sta-Lok Trademark

Sta-Lok is a registered trade mark and company logos should not be used without prior approval by said company.

Pricing Policy

Prices displayed show our recommended retail price. Individual trade accounts and discount programmes to suit the needs of your business can be arranged.

Every effort has been made to ensure that prices are correct at the time of printing.

Prices can be subject to alteration throughout the year and may be changed without notice.

All prices listed are shown in £'s Sterling or $ US Dollars as noted. All prices are exclusive of VAT, sales taxes and delivery costs.

Returns Policy

Rigging hardware manufactured by Sta-Lok is guaranteed at the time of shipment, to be free of defects in material and craftsmanship and only when used for the purpose intended.

Returned goods will not be accepted without notification and without prior approval by Sta-Lok Terminals Ltd. All returns must be prepaid and in a re-saleable condition before a credit can be issued.

Technical Information

Ongoing product development means that product specification may change.

Every effort has been made to ensure that technical information displayed is correct at the time of printing.

For any dimensions or product details, break loads, etc. not shown, please make contact with us, and our technical team will be happy to provide.

Useful Life and Liability

Yacht rigging should be inspected, checked and maintained regularly by an experienced yacht rigger or surveyor.

Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging and thus, no guarantee can be provided for product life, load capacity or other factors due to variability in usage.

Some regulatory body's and insurances will require the replacement of rigging and rigging components within certain time frames. You should ascertain if and what regulations apply to you, your yacht/vessel or your project to determine the relevant time-scales for replacement and qualified inspections.

Sta-Lok Terminals Ltd does not assume any responsibility for any incidental or consequential damages in connection with the use of its products.

Sta-Lok does not accept responsibility for products used in applications where safe working loads are exceeded, product has been improperly installed, and/or the product has been modified.

For full information, please refer to our Terms and Conditions at the back of this brochure.

Sta-Lok was announced as the first Official Standing Rigging Partner for the Clipper 70's in 2017. Product testing doesn't come much tougher than a 40,000 nautical mile race around the world and our hardware withstood every challenge. We returned as the Official Standing Rigging Partner for the 2019-20 edition - supplying over 450 bespoke fittings and 2150 metres of wire to rig out the fleet ahead of the 2019-2020 circumnavigation.

"Our fleet of 70-foot ocean racers are put to the ultimate test during their circumnavigation, so it is essential their rigging can stand up to the challenge. With more than 40 years' experience providing rigging hardware, we are very pleased to welcome Sta-Lok as our first Official Standing Rigging Partner."

SIR ROBIN KNOX-JOHNSTON
CLIPPER CHAIRMAN

CLIPPER ROUND THE WORLD 19-20 | OFFICIAL SUPPLIER

Sanya, China (Race 8, Clipper 2017 - 18).

Sta-Lok Self-Fit Terminals

The Sta-Lok system is a simple mechanical method of terminating 1x19, 7x7, 7x19 and compacted strand wire ropes.

Over 49 years since its inception, Sta-Lok terminals are used around the world and have gained world-wide recognition for high quality and reliability.

All Sta-Lok terminals can be installed using very simple hand tools and can be used for right hand and left hand lay, stainless steel wire rope from 3mm - 26mm (1/8" - 1").

The Sta-Lok terminal will work under constant loading and variable shock loading. The termination is stronger than the rated breaking load of the wire rope we recommend.

Please note:

1. Sta-Lok Terminals have been designed for use with stainless steel wire ropes. They should not be used with Galvanized wire ropes because galvanic action will cause the wire rope to corrode and fail.
2. Sta-Lok Terminals are not suitable for use with wire ropes with fibre cores.
3. Sta-Lok Terminals are not suitable for lifting slings.

In all situations the Sta-Lok terminal has proven to be totally reliable and is re-usable*

- Manufactured from high specification 316 stainless steel
- Hand fitted instead of machined swage
- Low Maintenance Costs
- Assemble on site, easy to install with simple hand tools
- No pre-measurement required
- A different wedge is required for 1x19, 7 strand and compacted strand wire rope
- All our wedges are laser marked for easy identification and selection

**A new wedge is required when re-terminating wire.*

***Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

How to fit a Sta-Lok Terminal

Stage 1

Slide socket component over wire.

TIP: Wind tape around wire approx. 12" (300mm) from end. This will prevent the socket from sliding down the wire.



Stage 2

Unravel outer strands 2" to 3" (50-76mm) to expose central core.



Stage 3

Slide wedge component over central core of wire rope

Please note:

Threads have been treated with anti-seizing gel to prevent galling.

Where it is decided to use loctite, threads should be cleaned.

You should refer to your chosen thread lock instructions / guidelines.

Stage 4

Reposition outer strands.

Turn outer strands either clockwise or anti-clockwise, depending on the lay of the wire, around the wedge. Ensure approx. 1/8" (2-3mm) of the central core protrudes from the end of the wedge.

Outer strands should be evenly situated around the wedge. Care should be taken to ensure that a strand does not slip into the slit of the wedge.

TIP: Push the socket towards end of wire, while repositioning the outer strands, this will help control. When wire strands are in position, push socket firmly, to hold wires in position.



Stage 5

Final Assembly.

Ensure former component sits in bottom of end fitting. Screw socket assembly into end fitting and tighten with spanners. The assembly is now complete.

TIP: Undue force is not required to terminate the wire. We would recommend taking the fitting back apart to check that the termination was successful (the outer wires folded over the wedge component).



Sta-Lok Eye

- Sta-Lok Self-Fit Terminal, the reusable alternative to machine swaging
- Quick and easy to install by hand, using basic hand tools
- Packed for 1×19 wire as standard - Different wedges are available to terminate 7 strand & compacted strand wire ropes
- Wedges should be replaced when re-terminating



Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	H (MM)	H (Inch)	Weight (KG)	Weight (LB)	Price ($)
033-03	3 MM	1/8"	17.9	0.705	10.0	0.393	5.0	0.196	6.5	1/4"	0.020	0.044	40.28
033-04	4 MM	5/32"	20.3	0.800	14.7	0.580	5.8	0.230	8.0	5/16"	0.040	0.088	43.46
033-05	5 MM	-	24.4	0.960	18.0	0.710	7.5	0.295	10.0	3/8"	0.080	0.176	51.94
133-05	-	3/16"	24.4	0.960	18.0	0.710	7.5	0.295	10.0	3/8"	0.080	0.176	51.94
133-55-3/8	-	7/32"	32.4	1.276	23.7	0.933	9.5	0.375	10.0	3/8"	0.140	0.309	66.78
133-55-7/16	-	7/32"	31.7	1.248	23.0	0.904	9.5	0.375	11.5	7/16"	0.140	0.309	66.78
133-55-1/2	-	7/32"	31.0	1.219	22.2	0.875	9.5	0.375	13.0	1/2"	0.140	0.309	66.78
033-06	6 MM	-	31.0	1.219	22.2	0.875	9.5	0.375	13.0	1/2"	0.140	0.309	66.78
133-06-3/8	-	1/4"	32.4	1.276	23.7	0.933	9.5	0.375	10.0	3/8"	0.140	0.309	66.78
133-06-7/16	-	1/4"	31.7	1.248	23.0	0.904	9.5	0.375	11.5	7/16"	0.140	0.309	66.78
133-06	-	1/4"	31.0	1.219	22.2	0.875	9.5	0.375	13.0	1/2"	0.140	0.309	66.78
033-07	7 MM	9/32"	32.5	1.281	24.6	0.969	10.5	0.413	13.0	1/2"	0.160	0.353	76.32
033-08-1/2	8 MM	5/16"	35.7	1.406	27.0	1.062	12.0	0.472	13.0	1/2"	0.240	0.529	93.28
033-08-5/8	8 MM	5/16"	35.7	1.406	27.0	1.062	13.5	0.531	16.0	5/8"	0.280	0.617	114.48
033-10	10 MM	-	41.1	1.619	29.2	1.150	13.5	0.531	16.0	5/8"	0.340	0.750	140.98
033-10-3/4	10 MM	-	41.1	1.619	29.2	1.150	13.5	0.531	19.5	3/4"	0.400	0.882	140.98
133-10	-	3/8"	41.1	1.619	29.2	1.150	13.5	0.531	16.0	5/8"	0.340	0.750	140.98
133-10-3/4	-	3/8"	41.1	1.619	29.2	1.150	13.5	0.531	19.5	3/4"	0.400	0.882	140.98
133-11	-	7/16"	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4"	0.680	1.499	209.88
033-12	12 MM	-	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4"	0.680	1.499	263.41
133-12	-	1/2"	42.8	1.687	33.3	1.312	19.0	0.748	19.5	3/4"	0.680	1.499	263.41
133-12-7/8	-	1/2"	42.8	1.687	33.3	1.312	19.0	0.748	22.5	7/8"	0.700	1.543	378.95
033-14	14 MM	9/16"	55.6	2.187	38.1	1.500	20.0	0.788	22.5	7/8"	1.100	2.425	408.10
033-14-1	14 MM	9/16"	55.6	2.187	38.1	1.500	20.0	0.788	25.4	1"	1.220	2.690	440.96
033-16	16 MM	5/8"	59.0	2.326	40.0	1.576	20.0	0.788	22.5	7/8"	1.420	3.131	474.35
033-16-1	16 MM	5/8"	60.0	2.364	40.0	1.576	20.0	0.788	25.4	1"	1.700	3.748	488.66
033-19	19 MM	3/4"	68.3	2.687	49.2	1.937	27.0	1.062	28.6	1 1/8"	2.820	6.217	1,002.23
033-22	22 MM	7/8"	82.6	3.250	60.3	2.375	33.3	1.312	35.0	1 3/8"	3.960	8.730	1,195.15
033-26	26 MM	1"	86.0	3.375	60.3	2.375	33.3	1.312	35.0	1 3/8"	5.300	11.684	1,571.98

Sta-Lok Stud

- Manufactured from high specification 316 stainless steel
- Suitable for right hand and left hand lay wire rope
- Sta-Lok Studs available in Right hand thread only and are supplied with split pin
- Packed for 1×19 wire as standard



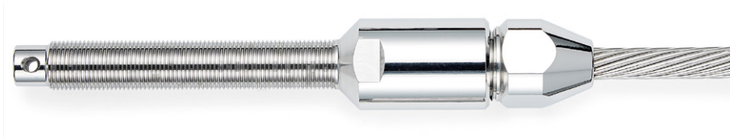

Reference	Wire Size (MM)	Wire Size (Inch)	Thread (UNF)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
036-03	3 MM	1/8"	1/4"	64.3	2.532	55.6	2.187	0.020	0.044	63.07
036-04-1/4	4 MM	5/32"	1/4"	65.0	2.562	55.6	2.187	0.040	0.088	48.23
036-04	4 MM	5/32"	5/16"	67.5	2.656	58.7	2.312	0.060	0.132	48.23
036-05-5/16	5 MM	-	5/16"	70.6	2.780	58.7	2.312	0.080	0.176	56.71
036-05	5 MM	-	3/8"	78.0	3.062	66.7	2.625	0.080	0.176	56.71
136-05-5/16	-	3/16"	5/16"	65.0	2.562	58.7	2.312	0.080	0.176	56.71
136-05	-	3/16"	3/8"	78.0	3.062	66.7	2.625	0.080	0.176	56.71
136-55	-	7/32"	3/8"	84.0	3.312	66.7	2.625	0.120	0.265	73.67
136-55-7/16	-	7/32"	7/16"	85.0	3.343	74.6	2.937	0.140	0.309	73.67
136-55-1/2	-	7/32"	1/2"	94.0	3.687	81.0	3.187	0.160	0.353	73.67
036-06-3/8	6 MM	-	3/8"	84.0	3.312	66.7	2.625	0.120	0.265	73.67
036-06	6 MM	-	7/16"	93.0	3.656	74.6	2.937	0.140	0.309	73.67
136-06-3/8	-	1/4"	3/8"	84.0	3.312	66.7	2.625	0.120	0.265	73.67
136-06	-	1/4"	7/16"	93.0	3.656	74.6	2.937	0.140	0.309	73.67
136-06-1/2	-	1/4"	1/2"	94.0	3.687	81.0	3.187	0.160	0.353	73.67
036-07-7/16	7 MM	9/32"	7/16"	95.0	3.750	74.6	2.937	0.180	0.397	90.10
036-07	7 MM	9/32"	1/2"	97.0	3.812	81.0	3.187	0.200	0.441	90.10
036-08	8 MM	5/16"	1/2"	98.0	3.875	81.0	3.187	0.240	0.529	107.59
036-08-5/8	8 MM	5/16"	5/8"	110.0	4.343	95.2	3.750	0.300	0.661	107.59
036-10	10 MM	-	5/8"	111.0	4.375	95.2	3.750	0.360	0.794	153.17
036-10-3/4	10 MM	-	3/4"	129.0	5.062	123.8	4.875	0.480	1.058	161.12
136-10	-	3/8"	5/8"	111.0	4.375	95.2	3.750	0.360	0.794	153.17
136-10-3/4	-	3/8"	3/4"	129.0	5.062	123.8	4.875	0.480	1.058	161.12
136-11	-	7/16"	3/4"	139.0	5.468	123.8	4.875	0.760	1.676	243.27
136-11-7/8	-	7/16"	7/8"	168.0	5.625	139.7	5.500	0.880	1.940	320.65
036-12	12 MM	-	3/4"	139.0	5.468	123.8	4.875	0.760	1.676	271.36
036-12-7/8	12 MM	-	7/8"	168.0	5.625	139.7	5.500	0.880	1.940	320.65
136-12	-	1/2"	3/4"	139.0	5.468	123.8	4.875	0.760	1.676	271.36
136-12-7/8	-	1/2"	7/8"	162.0	6.375	139.7	5.500	0.880	1.940	320.65
036-14	14 MM	9/16"	7/8"	170.0	6.687	139.7	5.500	1.300	2.866	438.21
036-14-100	14 MM	9/16"	1"	170.0	6.687	139.7	5.500	1.420	3.131	479.54
036-16	16 MM	5/8"	1"	171.0	6.750	139.7	5.500	1.660	3.660	545.90
036-19	19 MM	3/4"	1 1/8"	213.0	8.375	171.5	6.750	3.140	6.923	1,183.49
036-22	22 MM	7/8"	1 1/4"	275.0	10.812	227.0	8.937	4.540	10.009	1,636.11
036-26	26 MM	1"	1 3/8"	284.0	11.187	232.0	9.125	5.100	11.244	1,918.60

Sta-Lok Fork

- Sta-Lok Self-Fit Terminal, the reusable alternative to machine swaging
- Quick and easy to install by hand, using basic hand tools
- Packed for 1×19 wire as standard - Different wedges are available to terminate 7 strand & compacted strand wire ropes
- Wedges should be replaced when re-terminating

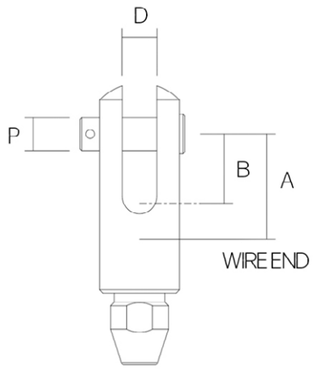

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
034-03	3 MM	1/8"	15.5	0.609	10.0	0.393	5.5	0.216	5.0	3/16"	0.040	0.088	48.76
034-04	4 MM	5/32"	21.1	0.830	14.7	0.580	6.4	0.250	6.4	1/4"	0.060	0.132	56.18
034-05	5 MM	-	29.5	1.162	18.0	0.708	8.0	0.315	8.0	5/16"	0.100	0.220	63.60
134-05	-	3/16"	29.5	1.162	18.0	0.708	8.0	0.315	8.0	5/16"	0.100	0.220	63.60
134-55	-	7/32"	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16"	0.220	0.485	87.45
034-06	6 MM	-	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16"	0.220	0.485	87.45
134-06	-	1/4"	37.1	1.459	22.2	0.875	11.1	0.437	10.9	7/16"	0.220	0.485	87.45
034-07	7 MM	9/32"	33.9	1.333	25.1	0.990	11.1	0.437	10.9	7/16"	0.240	0.529	116.07
034-07-1/2	7 MM	9/32"	43.9	1.729	26.3	1.035	13.7	0.540	12.6	1/2"	0.420	0.926	138.33
034-08	8 MM	5/16"	43.9	1.729	26.3	1.035	13.7	0.540	12.6	1/2"	0.420	0.926	138.33
034-10	10 MM	-	50.1	1.973	29.4	1.155	13.7	0.540	15.6	5/8"	0.620	1.367	172.78
134-10	-	3/8"	50.1	1.973	29.4	1.155	13.7	0.540	15.6	5/8"	0.620	1.367	172.78
134-11	-	7/16"	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4"	1.180	2.601	429.30
034-12	12 MM	-	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4"	1.180	2.601	429.30
134-12	-	1/2"	46.0	1.812	33.3	1.312	19.1	0.750	18.5	3/4"	1.180	2.601	429.30
034-14	14 MM	9/16"	54.0	2.125	38.1	1.500	20.4	0.803	21.5	7/8"	1.580	3.483	533.71
034-16	16 MM	5/8"	72.7	2.861	40.0	1.576	20.4	0.803	25.0	1"	1.980	4.365	682.64
034-19	19 MM	3/4"	92.0	3.622	50.0	1.970	27.8	1.093	27.5	1 1/16"	4.100	9.039	1,291.61
034-22	22 MM	7/8"	92.0	3.622	60.3	2.375	34.9	1.375	33.0	1 5/16"	5.600	12.346	1,526.40
034-26	26 MM	1"	92.0	3.622	60.3	2.375	34.9	1.375	33.0	1 5/16"	7.600	16.755	2,159.60

Sta-Lok Toggle Fork

- Manufactured from high specification 316 stainless steel
- Suitable for right hand and left hand lay wire rope
- Packed for 1×19 wire as standard - Different wedges are available to terminate 7 strand & compacted strand wire ropes
- Wedges should be replaced when re-terminating

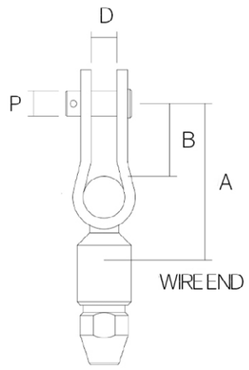

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
050-04	4 MM	5/32"	48.0	1.890	19.0	0.750	8.4	0.331	7.9	5/16"	0.080	0.176	70.49
050-05-5/16	5 MM	-	48.0	1.890	19.0	0.750	8.4	0.331	7.9	5/16"	0.100	0.220	76.32
050-05	5 MM	-	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8"	0.140	0.309	78.97
150-05-5/16	-	3/16"	48.0	1.890	19.0	0.748	8.4	0.453	7.9	5/16"	0.100	0.220	76.32
150-05	-	3/16"	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8"	0.140	0.309	78.97
150-55	-	7/32"	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8"	0.180	0.397	97.52
150-55-7/16	-	7/32"	61.0	2.406	25.0	0.984	11.5	0.453	11.1	7/16"	0.220	0.485	97.52
050-06-3/8	6 MM	-	56.0	2.205	20.0	0.787	9.9	0.390	9.5	3/8"	0.180	0.397	97.52
050-06	6 MM	-	61.0	2.406	25.0	0.984	11.5	0.453	11.1	7/16"	0.220	0.485	97.52
150-06	-	1/4"	65.9	2.594	28.0	1.102	13.1	0.516	12.7	1/2"	0.300	0.661	107.59
050-07	7 MM	9/32"	70.0	2.755	28.0	1.102	13.1	0.516	12.7	1/2"	0.340	0.750	125.61
050-08	8 MM	5/16"	72.0	2.835	28.0	1.102	13.1	0.516	12.7	1/2"	0.400	0.882	135.15
050-08-5/8	8 MM	5/16"	87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8"	0.600	1.323	144.69
050-10	10 MM	-	87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8"	0.680	1.499	179.67
150-10	-	3/8"	87.0	3.422	33.0	1.299	16.3	0.642	16.0	5/8"	0.660	1.455	179.67
050-12	12 MM	-	104.0	4.094	34.0	1.339	25.0	0.984	19.1	3/4"	0.680	1.499	464.80

Sta-Lok Long Stud

- Manufactured from high specification 316 stainless steel
- No pre-measurement needed, self-fitted using simple hand tools
- The additional length of the long stud enables replacement of damaged & unseaworthy swages or seized turnbuckles without having to replace the wire rope

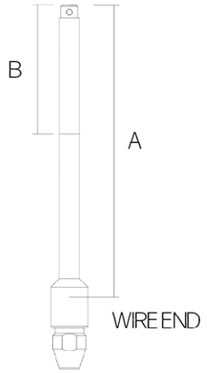

Reference	Wire Size (MM)	Wire Size (Inch)	Thread (UNF)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
076-04	4 MM	5/32"	5/16"	141.3	5.562	54.0	2.125	0.080	0.176	66.25
076-05-5/16	5 MM	-	5/16"	154.0	6.062	54.0	2.125	0.120	0.265	73.14
076-05	5 MM	-	3/8"	166.6	6.562	66.7	2.625	0.160	0.353	73.14
176-05-5/16	-	3/16"	5/16"	154.0	6.062	54.0	2.125	0.120	0.265	73.14
176-05	-	3/16"	3/8"	166.6	6.562	66.7	2.625	0.160	0.353	73.14
176-55	-	7/32"	3/8"	180.2	7.094	66.7	2.625	0.180	0.397	82.68
176-55-7/16	-	7/32"	7/16"	188.5	7.422	76.2	3.000	0.220	0.485	85.33
076-06-3/8	6 MM	-	3/8"	180.2	7.094	66.7	2.625	0.180	0.397	82.68
076-06	6 MM	-	7/16"	188.5	7.422	76.2	3.000	0.220	0.485	85.33
176-06-3/8	-	1/4"	3/8"	180.2	7.094	66.7	2.625	0.180	0.397	82.68
176-06	-	1/4"	7/16"	188.5	7.422	76.2	3.000	0.220	0.485	85.33
176-06-1/2	-	1/4"	1/2"	225.4	8.875	82.6	3.250	0.300	0.661	93.28
076-07	7 MM	9/32"	1/2"	225.4	8.875	82.6	3.250	0.380	0.838	121.90
076-08	8 MM	5/16"	1/2"	225.4	8.875	82.6	3.250	0.420	0.926	144.16
076-08-5/8	8 MM	5/16"	5/8"	271.5	10.687	95.2	3.750	0.600	1.323	175.40
076-10	10 MM	-	5/8"	272.3	10.719	95.2	3.750	0.700	1.543	186.56
176-10	-	3/8"	5/8"	272.3	10.719	95.2	3.750	0.700	1.543	186.56
176-11	-	7/16"	3/4"	339.7	13.375	115.1	4.531	1.300	2.866	395.91
076-12	12 MM	-	3/4"	339.7	13.375	115.1	4.531	1.300	2.866	395.91
176-12	-	1/2"	3/4"	339.7	13.375	115.1	4.531	1.300	2.866	395.91
076-14	14 MM	9/16"	7/8"	384.2	15.125	139.7	5.500	2.230	4.916	475.41
076-16	16 MM	5/8"	1"	442.0	17.041	139.7	5.500	2.850	6.283	577.70

910 259 3394 | usa@stalok.com | stalok.com

Sta-Lok Long Eye

- Sta-Lok Self-Fit Terminal, providing instant repair, anywhere
- Quick and easy to install by hand, using basic hand tools
- Packed for 1×19 wire as standard - Different wedges are available to terminate 7 strand & compacted strand wire ropes
- Wedges should be replaced when re-terminating

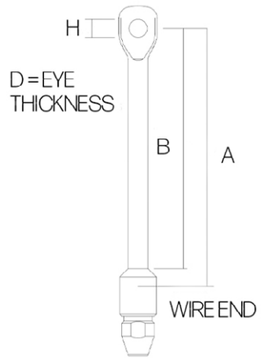

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	H (MM)	H (Inch)	Weight (KG)	Weight (LB)	Price ($)
078-05	5 MM	-	106.0	4.187	82.5	3.250	7.5	0.295	9.8	3/8"	0.120	0.265	81.09
178-05	-	3/16"	106.0	4.187	82.5	3.250	7.5	0.295	9.8	3/8"	0.120	0.265	81.09
178-55-3/8	-	7/32"	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8"	0.200	0.441	92.22
178-55	-	7/32"	126.0	4.875	100.0	3.937	9.5	0.375	11.5	7/16"	0.200	0.441	92.22
078-06-3/8	6 MM	-	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8"	0.200	0.441	92.22
078-06	6 MM	-	126.0	4.875	100.0	3.937	9.5	0.375	11.5	7/16"	0.200	0.441	92.22
078-06-1/2	6 MM	-	147.0	5.750	117.5	4.625	12.0	0.472	13.0	1/2"	0.260	0.573	103.88
178-06-3/8	-	1/4"	126.0	4.875	100.0	3.937	7.5	0.295	9.8	3/8"	0.200	0.441	92.22
178-06	-	1/4"	147.0	5.750	117.5	4.625	12.0	0.472	13.0	1/2"	0.260	0.573	103.88
078-07	7 MM	9/32"	147.0	5.781	117.5	4.625	12.0	0.472	13.0	1/2"	0.300	0.661	110.24
078-08	8 MM	5/16"	147.0	5.781	117.5	4.625	12.0	0.472	13.0	1/2"	0.360	0.794	123.49
078-08-5/8	8 MM	5/16"	175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8"	0.540	1.190	148.40
078-10	10 MM	-	175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8"	0.640	1.411	183.38
178-10	-	3/8"	175.0	6.889	136.4	5.369	13.5	0.531	16.0	5/8"	0.640	1.411	183.38
178-11	-	7/16"	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4"	1.300	2.866	366.23
078-12	12 MM	-	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4"	1.300	2.866	366.23
178-12	-	1/2"	254.0	10.000	205.8	8.102	19.0	0.748	19.5	3/4"	1.300	2.866	366.23
078-14	14 MM	9/16"	330.0	13.000	280.5	11.000	21.0	0.827	22.5	7/8"	2.100	4.630	461.63
078-16	16 MM	5/8"	320.0	12.600	303.6	11.955	24.0	0.945	25.6	1"	2.700	5.952	562.33

910 259 3394 | usa@stalok.com | stalok.com

Sta-Lok Stemball

- Sta-Lok Self-Fit Terminal, the reusable alternative to swage
- Packed for 1×19 wire as standard - Different wedges are available to terminate 7 strand & compacted strand wire ropes
- Two part assembly – Threadlock recommended
- Can be used with Stemball Cup (page 68) to bring head size up to fit mast / spreader brackets

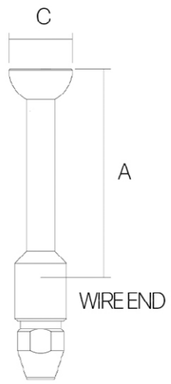

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	C (MM)	C (Inch)	Weight (KG)	Weight (LB)	Price ($)
146-55	-	7/32"	96.0	3.779	21.2	0.835	0.180	0.397	101.23
046-06	6 MM	-	96.0	3.779	21.2	0.835	0.180	0.397	101.23
146-06	-	1/4"	96.0	3.779	21.2	0.835	0.200	0.441	118.51
046-07	7 MM	9/32"	110.0	4.330	21.6	0.850	0.280	0.617	129.32
046-08	8 MM	5/16"	125.0	4.921	26.5	1.043	0.380	0.838	144.16
046-10	10 MM	-	168.0	6.614	27.6	1.086	0.500	1.102	204.58
146-10	-	3/8"	168.0	6.614	27.6	1.086	0.500	1.102	204.58

910 259 3394 | usa@stalok.com | stalok.com

Sta-Lok Stay Connector

- Sta-Lok Self-Fit Terminal, providing instant repair, anywhere
- Joins two wires together
- Quick and easy to install by hand, using basic hand tools
- Packed for 1×19 wire as standard - Different wedges are available
- Wedges should be replaced when re-terminating



Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	C (MM)	C (Inch)	Weight (KG)	Weight (LB)	Price ($)
072-04	4 MM	5/32"	11.1	0.437	14.3	0.562	0.060	0.132	84.33
072-05	5 MM	-	14.3	0.563	15.9	0.625	0.080	0.176	97.01
172-05	-	3/16"	14.3	0.563	15.9	0.625	0.080	0.176	97.01
172-55	-	7/32"	20.6	0.812	19.1	0.750	0.160	0.353	113.42
072-06	6 MM	-	20.6	0.812	19.1	0.750	0.160	0.353	113.42
172-06	-	1/4"	20.6	0.812	19.1	0.750	0.160	0.353	113.42
072-07	7 MM	9/32"	19.1	0.750	22.2	0.875	0.240	0.529	128.26
072-08	8 MM	5/16"	19.1	0.750	25.4	1.000	0.300	0.661	142.04
072-10	10 MM	-	24.0	0.937	28.6	1.125	0.420	0.926	200.34
172-10	-	3/8"	24.0	0.937	28.6	1.125	0.420	0.926	200.34
172-11	-	7/16"	25.4	1.000	34.9	1.375	0.900	1.984	345.03
072-12	12 MM	-	25.4	1.000	34.9	1.375	0.900	1.984	345.03
172-12	-	1/2"	25.4	1.000	34.9	1.375	0.900	1.984	345.03

910 259 3394 | usa@stalok.com | stalok.com

Sta-Lok 1x19 Wedge

- Must be replaced where Sta-Lok terminals are being re-used
- Must not be used for Dyform, compacted or 7 strand wire ropes
- Individual wedges are laser marked for easy identification

Reference	Wire Size (MM)	Wire Size (Inch)	Pack (Qty)	Weight per pack (KG)	Weight per pack LB)	Price ($)
126-03	3 MM	1/8"	5	0.006	0.013	26.50
126-04	4 MM	5/32"	5	0.010	0.022	37.63
126-05	5 MM	-	5	0.015	0.033	38.69
138-05	-	3/16"	5	0.016	0.035	38.69
138-55	-	7/32"	5	0.034	0.075	45.05
126-06	6 MM	-	5	0.150	0.331	45.05
138-06	-	1/4"	5	0.151	0.333	45.05
126-07	7 MM	9/32"	5	0.195	0.430	51.94
126-08	8 MM	5/16"	2	0.054	0.119	26.50
126-10	10 MM	-	2	0.096	0.212	36.57
138-10	-	3/8"	2	0.097	0.214	36.57
138-11	-	7/16"	1	0.048	0.106	24.91
126-12	12 MM	-	1	0.042	0.093	24.91
138-12	-	1/2"	1	0.043	0.095	24.91
126-14	14 MM	9/16"	1	0.069	0.152	43.46
126-16	16 MM	5/8"	1	0.110	0.243	50.35
126-19	19 MM	3/4"	1	0.180	0.397	175.65
126-22	22 MM	7/8"	1	0.260	0.573	190.35
126-26	26 MM	1"	1	0.380	0.838	198.45

Sta-Lok 7 Strand

- Must be replaced where Sta-Lok terminals are being re-used
- For use with 7×7 and 7×19 stainless steel wire construction only
- Laser marked for easy identification

Reference	Wire Size (MM)	Wire Size (Inch)	Pack (Qty)	Weight per pack (KG)	Weight per pack (LB)	Price ($)
127-03	3 MM	1/8"	5	0.004	0.009	39.75
127-04	4 MM	5/32"	5	0.008	0.018	46.64
127-05	5 MM	-	5	0.013	0.029	52.47
139-05	-	3/16"	5	0.013	0.029	52.47
127-06	6 MM	-	5	0.029	0.064	55.65
139-06	-	1/4"	5	0.029	0.064	55.65
127-07	7 MM	9/32"	5	0.017	0.037	55.65
127-08	8 MM	5/16"	2	0.024	0.053	30.74
127-10	10 MM	-	2	0.042	0.093	41.87
139-10	-	3/8"	2	0.020	0.044	41.87
127-12	12 MM	-	1	0.040	0.088	42.93
139-12	-	1/2"	1	0.040	0.040	42.93
127-14	14 MM	9/16"	1	0.069	0.152	48.39
127-16	16 MM	5/8"	1	0.101	0.223	64.28

Metric only

Sta-Lok Dyform & Compacted Wedges

- Compacted strand and Dyform wire ropes provide higher breaking loads and lower stretch than conventional 1 x 19 wire
- There are 5 different constructions (1×7), (1×19), (1×25), (1×31) and (1×36)
- For use only with Compacted Strand or Dyform wire rope (see table below)

Reference	Wire Size (MM)	Construction	Compacted Strand	Dyform	Pack (Qty)	Weight per pack (KG)	Weight per pack (LB)	Price ($)
154-03C	3 MM	1x7	Yes	No	5	0.005	0.011	26.50
154-04	4 MM	1x7	Yes	Yes	5	0.005	0.011	42.93
154-05	5 MM	1x19	Yes	Yes	5	0.010	0.022	45.58
154-06	6 MM	1x19	No	Yes	5	0.025	0.055	51.41
154-06C	6 MM	1x19	Yes	No	5	0.022	0.049	51.41
154-07	7 MM	1x19	No	Yes	5	0.028	0.062	59.89
154-07C	7 MM	1x19	Yes	No	5	0.025	0.055	59.89
154-08	8 MM	1x19	Yes	Yes	2	0.017	0.037	30.74
154-10	10 MM	1x19	Yes	Yes	2	0.033	0.073	41.87
154-12	12 MM	1x19	No	Yes	1	0.033	0.073	28.09
154-12C19	12 MM	1x19	Yes	No	1	0.030	0.066	28.09
154-14C19	14 MM	1x19	Yes	No	1	0.056	0.123	49.82
154-14	14 MM	1x25	Yes	Yes	1	0.060	0.132	49.82
154-14C36	14 MM	1x36	Yes	No	1	0.060	0.132	49.82
154-16	16 MM	1x25	No	Yes	1	0.110	0.243	57.24
154-16C25	16 MM	1x25	Yes	No	1	0.110	0.243	57.24
154-16C	16 MM	1x36	Yes	No	1	0.110	0.243	57.24
154-19C25	19 MM	1x25	Yes	No	1	0.140	0.309	175.66
154-19	19 MM	1x31	No	Yes	1	0.140	0.309	175.66
154-19C36	19 MM	1x36	Yes	No	1	0.140	0.309	175.66

Sta-Lok Former

- Recommended to replace where Sta-Lok Self-Fit terminals are being re-used
- Manufactured from stainless steel
- Also available as part of Socket, Wedge & Former Kit

Reference	Wire Size (MM)	Wire Size (Inch)	Pack (Qty)	Weight per pack (KG)	Weight per pack (LB)	Price ($)
115-03	3 MM	1/8"	5	0.005	0.011	18.02
115-04	4 MM	5/32"	5	0.005	0.011	18.02
115-05	5 MM	3/16"	5	0.010	0.022	21.20
115-06	6 MM	7/32" & 1/4"	5	0.020	0.044	22.26
115-07	7 MM	9/32"	5	0.025	0.055	26.50
115-08	8 MM	5/16"	2	0.012	0.026	13.25
115-10	10 MM	3/8"	2	0.018	0.040	16.96
115-12	12 MM	7/16" & 1/2"	1	0.020	0.044	19.08
115-14	14 MM	9/16"	1	0.043	0.095	30.74
115-16	16 MM	5/8"	1	0.063	0.139	37.10
115-19	19 MM	3/4"	1	0.121	0.267	163.14
115-22	22 MM	7/8"	1	0.158	0.348	171.72
115-26	26 MM	1"	1	0.198	0.437	198.71

Metric only | Inch only

Sta-Lok Socket, Wedge & Former Kit

- Recommended where Sta-Lok terminals are being re-used
- Packed for 1×19 wire as standard
- Different wedges are available to terminate 7 strand & compacted strand wire ropes

Reference	Wire Size (MM)	Wire Size (Inch)	Weight (KG)	Weight (LB)	Price ($)
208-04	4 MM	5/32"	0.020	0.044	31.27
208-05	5 MM	-	0.021	0.046	34.98
211-05	-	3/16"	0.024	0.053	34.98
211-55	-	7/32"	0.015	0.033	39.22
208-06	6 MM	-	0.040	0.088	39.22
211-06	-	1/4"	0.040	0.088	39.22
208-07	7 MM	9/32"	0.060	0.132	46.64
227-07*	7 MM	9/32"	0.058	0.128	46.64
208-08	8 MM	5/16"	0.074	0.163	48.23
208-10	10 MM	-	0.116	0.256	66.78
211-10	-	3/8"	0.116	0.256	66.78
211-11	-	7/16"	0.116	0.256	119.25
211-12	-	1/2"	0.216	0.476	119.25
208-12	12 MM	-	0.217	0.478	119.25
208-14	14 MM	9/16"	0.500	1.102	182.32
208-16	16 MM	5/8"	0.660	1.455	242.74
208-19	19 MM	3/4"	1.320	2.910	450.50
208-22	22 MM	7/8"	1.700	3.748	550.14
208-26	26 MM	1"	2.260	4.980	707.02

*227-07 is a special Terminal Part for Insulators only.

910 259 3394 | usa@stalok.com | stalok.com

Hudson River, New York.

Sta-Lok Insulators

Insulators are designed to insulate a section of the boat rigging, turning it into an aerial and the ideal antenna for radio transmission and reception.

Sta-Lok Insulators have proven themselves over the years to be an effective and totally reliable method of converting yacht backstays into radio antenna. Backstays are used as it is the longest single length of wire on the boat.

Industry guidance is that the wire between insulators should be a minimum of 7 meters, with the first insulator situated above head height to avoid touching while transmitting.

The main body of the Sta-Lok Insulator consists of an ingenious stainless steel assembly which is embedded in a black weather-proof nylon moulding, designed to exceed the breaking load of the backstay.

Electrical Properties

Impedance Measurement @15MHz, Capacitance 16pF Resistance 400K, D.C.Leakage Resistance @ 30Kv, Greater than 10 G Ohms.

Voltage Proof Test - Withstands 30 Kv applied for 2 hours without breakdown. No change in 15 MHz impedance after voltage proof test.

Please note:

1. Insulators should not be used with hydraulic backstay adjustors.
2. Yacht rigging and Insulators should be inspected, checked and maintained regularly.

910 259 3394 | usa@stalok.com | stalok.com

Insulator Body

- Main body of the Sta-Lok Insulator
- Variety of end fittings available



Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
206-06	6 MM	7/32" & 1/4"	152.0	6.000	35.0	1.375	0.370	0.816	211.47
206-08	7 MM & 8 MM	9/32" & 5/16"	164.0	6.500	38.0	1.500	0.474	1.045	245.39
206-10	10 MM	3/8"	175.0	6.875	41.0	1.625	0.605	1.334	310.58
206-12*	12 MM	7/16" & 1/2"	215.0	8.500	52.0	2.000	1.700	3.748	355.10

*Achieves 93% of rated breaking load on 12mm compacted strand wire rope.

910 259 3394 | usa@stalok.com | stalok.com

Metric only | Inch only

Insulator Terminal to Terminal

- Use on standing rigging to provide radio antenna
- Incorporates Sta-Lok Self fit termination
- Packed for 1×19 wire as standard
- Different wedges are available to terminate 7 strand and compacted strand wire ropes

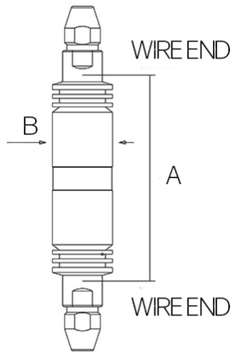

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
143-55	-	7/32"	114.0	4.488	35.0	1.375	0.459	1.012	281.43
043-06	6 MM	-	114.0	4.488	35.0	1.375	0.459	1.012	281.43
143-06	-	1/4"	114.0	4.488	35.0	1.375	0.459	1.012	281.43
043-07	7 MM	9/32"	112.0	4.409	38.0	1.500	0.625	1.378	326.48
043-08	8 MM	5/16"	112.0	4.409	38.0	1.500	0.626	1.380	339.73
043-10	10 MM	-	121.0	4.764	41.0	1.625	0.851	1.876	451.03
143-10	-	3/8"	121.0	4.764	41.0	1.625	0.851	1.876	451.03
143-11	-	7/16"	149.0	5.866	52.0	2.000	2.100	4.630	674.69
043-12*	12 MM	-	149.0	5.866	52.0	2.000	2.100	4.630	674.69
143-12	-	1/2"	149.0	5.866	52.0	2.000	2.100	4.630	674.69

*Achieves 93% of rated breaking load on 12mm compacted strand wire rope.

Insulator Eye Kit

- Eye Part for Insulators
- Includes adaptor screw for assembly into insulator body
- Thread lock is recommended to use with this product



Reference	Body Reference	B (MM)	B (Inch)	D (MM)	D (Inch)	H (MM)	H (Inch)	Weight (KG)	Weight (LB)	Price ($)
20907-55	206-06	23.0	0.940	9.5	0.375	11.5	7/16"	0.137	0.302	70.60
20907-06	206-06	22.2	0.875	9.5	0.375	13.0	1/2"	0.137	0.302	70.49
20907-07	206-08	24.6	0.969	10.5	0.413	13.0	1/2"	0.179	0.395	83.74
20907-08	206-08	27.0	1.062	12.0	0.472	13.0	1/2"	0.156	0.344	92.75
20907-08-5/8	206-08	27.0	1.062	13.5	0.531	16.0	5/8"	0.276	0.608	139.92
20907-10	206-10	29.2	1.150	13.5	0.531	16.0	5/8"	0.336	0.741	149.46
20907-12	206-12	33.3	1.312	19.0	0.748	19.5	3/4"	0.486	1.071	187.09

Sta-Lok Swage Terminals

Our stainless steel swage terminals have been designed for use with 1×19, 7×19, 7×7 and compacted strand stainless steel wire rope and can be installed using both rotary & fixed die swaging machines.

Designed with 10 x D hole depths for greater grip and high breaking loads.

Manufactured from 316 stainless steel. All swage terminals are machined to close tolerances to ensure accurate termination.

We have developed a wide selection of products to suit all masts, spreaders and chainplates for metric and inch wire rope from 3mm (1/8") to 26mm (1").

Sta-Lok Swage fittings require professional swaging onto wire rope and are not designed for hand crimping.

Please note:

1. Sta-Lok Swage Terminals have been designed for use with stainless steel wire ropes. They should not be used with Galvanized wire ropes because galvanic action will cause the wire rope to corrode and fail.
2. Sta-Lok Swage Terminals are not suitable for use with fibre ropes or wires with fibre cores.

**Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

910 259 3394 | usa@stalok.com | stalok.com

Metric only | Inch only

Swage Stud
Open Body



- Suitable for Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Suitable for use with rotary & fixed die swaging machines
- Minimum hole depth 10x wire diameter
- Right hand thread only - Can be used with both open and closed body turnbuckles
- Supplied with split pin

Reference	Wire Size (MM)	Wire Size (Inch)	Thread (UNF)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
051-03	3 MM	1/8"	1/4"	6.2	0.245	56.0	2.204	0.020	0.044	11.66
051-04-1/4	4 MM	5/32"	1/4"	7.4	0.292	56.0	2.204	0.020	0.044	12.19
051-04	4 MM	5/32"	5/16"	7.4	0.292	60.0	2.362	0.040	0.088	12.19
051-05-5/16	5 MM	3/16"	5/16"	9.0	0.354	60.0	2.362	0.040	0.088	16.43
051-05	5 MM	3/16"	3/8"	9.0	0.354	67.0	2.625	0.060	0.132	16.43
151-55	-	7/32"	3/8"	10.7	0.422	67.0	2.625	0.070	0.154	24.38
151-55-7/16	-	7/32"	7/16"	10.7	0.422	75.0	2.953	0.080	0.176	24.38
051-06-3/8	6 MM	-	3/8"	12.4	0.489	67.0	2.625	0.080	0.176	24.38
051-06	6 MM	-	7/16"	12.4	0.489	75.0	2.953	0.100	0.220	24.38
151-06-3/8	-	1/4"	3/8"	12.5	0.494	67.0	2.625	0.100	0.220	24.38
151-06	-	1/4"	7/16"	12.5	0.494	75.0	2.953	0.100	0.220	25.44
151-06-1/2	-	1/4"	1/2"	12.5	0.494	81.0	3.187	0.140	0.309	25.44
051-07-7/16	7 MM	9/32"	7/16"	14.2	0.558	75.0	2.953	0.140	0.309	34.98
051-07	7 MM	9/32"	1/2"	14.2	0.558	81.0	3.187	0.160	0.353	34.98
051-08	8 MM	5/16"	1/2"	16.1	0.630	81.0	3.187	0.180	0.397	41.34
051-08-5/8	8 MM	5/16"	5/8"	16.1	0.630	100.0	3.937	0.260	0.573	44.52
051-10	10 MM	-	5/8"	17.7	0.698	100.0	3.937	0.300	0.661	55.12
151-10	-	3/8"	5/8"	17.7	0.698	100.0	3.937	0.300	0.661	55.12
151-11	-	7/16"	3/4"	19.6	0.776	124.0	4.875	0.540	1.190	106.00
051-12	12 MM	-	3/4"	21.3	0.839	124.0	4.875	0.540	1.190	106.00
051-12-7/8	12 MM	-	7/8"	21.3	0.839	140.0	5.511	0.680	1.499	202.46
151-12	-	1/2"	3/4"	21.3	0.839	124.0	4.875	0.540	1.190	106.00
051-14	14 MM	9/16"	7/8"	24.9	0.979	140.0	5.511	0.900	1.984	202.46
051-16	16 MM	5/8"	1"	28.0	1.104	162.0	6.375	1.260	2.778	243.80
051-19	19 MM	3/4"	1 1/8"	34.4	1.354	184.0	7.250	2.100	4.630	331.78
051-22	22 MM	7/8"	1 1/4"	40.3	1.588	215.0	8.464	3.220	7.099	477.00
051-26	26 MM	1"	1 3/8"	45.8	1.807	220.0	8.656	4.000	8.818	623.28

910 259 3394 | usa@stalok.com | stalok.com

Swage
Toggle Fork

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Unique toggle action for articulation in two planes

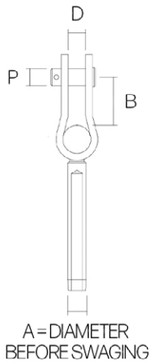

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
038-03	3 MM	1/8"	6.2	0.245	14.4	0.567	6.4	0.252	6.4	1/4"	0.040	0.088	19.61
038-04	4 MM	5/32"	7.4	0.292	19.0	0.750	8.4	0.331	7.9	5/16"	0.060	0.132	21.73
038-05	5 MM	3/16"	9.0	0.354	20.0	0.787	9.9	0.390	9.5	3/8"	0.100	0.220	30.21
132-55	-	7/32"	10.7	0.422	25.0	0.984	11.5	0.453	11.1	7/16"	0.200	0.441	43.46
038-06	6 MM	-	12.4	0.439	25.0	0.984	11.5	0.453	11.1	7/16"	0.200	0.441	43.46
132-06	-	1/4"	12.5	0.494	28.0	1.102	13.1	0.516	12.7	1/2"	0.250	0.551	55.12
038-07	7 MM	9/32"	14.2	0.558	28.0	1.102	13.1	0.516	12.7	1/2"	0.280	0.617	61.48
038-08	8 MM	5/16"	16.1	0.630	28.0	1.102	13.1	0.516	12.7	1/2"	0.320	0.705	67.84
038-08-5/8	8 MM	5/16"	16.1	0.630	33.0	1.299	16.3	0.642	16.0	5/8"	0.500	1.103	87.45
038-10	10 MM	-	17.7	0.698	33.0	1.299	16.3	0.642	16.0	5/8"	0.560	1.235	99.11
132-10	-	3/8"	17.7	0.698	33.0	1.299	16.3	0.642	16.0	5/8"	0.560	1.235	99.11
132-11	-	7/16"	19.6	0.776	34.0	1.339	19.1	0.752	18.5	3/4"	1.140	2.513	271.81
038-12	12 MM	-	21.3	0.839	34.0	1.339	19.1	0.752	18.5	3/4"	1.140	2.513	271.81
132-12	-	1/2"	21.3	0.839	34.0	1.339	19.1	0.752	18.5	3/4"	1.140	2.513	271.81

Swage Eye
Toggle Fork

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Modular system
- Unique toggle action for articulation in two planes

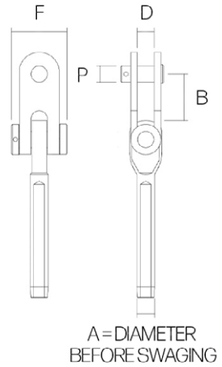

Ref	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	F (MM)	F (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
132 ET-11	-	7/16"	19.6	0.776	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4"	1.420	3.131	221.54
038 ET-12	12 MM	-	21.3	0.839	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4"	1.420	3.131	230.02
132 ET-12	-	1/2"	21.3	0.839	56.0	2.205	20.0	0.787	66.0	2.598	18.5	3/4"	1.420	3.131	230.02
038 ET-14	14 MM	9/16"	24.9	0.979	63.0	2.480	25.0	0.984	78.0	3.071	21.5	7/8"	2.160	4.762	339.73
038 ET-16	16 MM	5/8"	28.0	1.104	67.5	2.657	28.0	1.102	82.0	3.228	25.0	1"	3.080	6.790	484.42
038 ET-19	19 MM	3/4"	34.4	1.354	70.0	2.756	31.5	1.240	89.0	3.504	28.2	1 1/8"	4.700	10.362	886.69
038 ET-22	22 MM	7/8"	40.3	1.588	79.0	3.110	35.0	1.378	98.0	3.858	31.5	1 1/4"	6.800	14.991	1,028.73
038 ET-26	26 MM	1"	45.8	1.807	98.0	3.858	38.0	1.496	110.0	4.331	34.6	1 3/8"	9.500	20.944	1,509.44

Swage Eyes

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Available in 3 different styles, Narrow, Forged and Machined

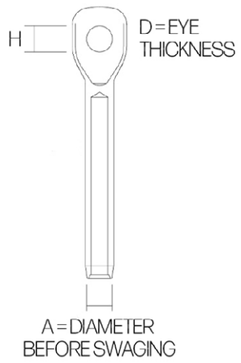

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	D (MM)	D (Inch)	H (MM)	H (Inch)	Weight (KG)	Weight (LB)	Price ($)
Narrow Eyes											
039N-03	3 MM	1/8"	6.2	0.245	4.0	0.157	6.5	1/4"	0.014	0.031	11.68
039N-04	4 MM	5/32"	7.4	0.292	5.0	0.197	8.5	5/16"	0.022	0.049	11.88
039N-05	5 MM	3/16"	9.0	0.354	6.0	0.236	10.0	3/8"	0.040	0.088	19.76
130N-55	-	7/32"	10.7	0.422	8.0	0.315	11.5	7/16"	0.100	0.220	26.19
039N-06	6 MM	-	12.4	0.488	8.0	0.315	11.5	7/16"	0.100	0.220	25.07
130N-06	-	1/4"	12.5	0.494	8.0	0.315	13.0	1/2"	0.100	0.220	39.14
039N-07	7 MM	9/32"	14.2	0.558	9.0	0.354	13.0	1/2"	0.120	0.265	28.57
039N-08	8 MM	5/16"	16.1	0.630	10.0	0.394	13.0	1/2"	0.180	0.397	43.71
039N-08-5/8	8 MM	5/16"	16.1	0.630	12.0	0.472	16.5	5/8"	0.240	0.529	51.45
039N-10	10 MM	-	17.7	0.698	11.0	0.433	16.2	5/8"	0.260	0.573	87.04
130N-10	-	3/8"	17.7	0.698	11.0	0.433	16.0	5/8"	0.240	0.529	83.34
Machined Eyes											
130-11	-	7/16"	19.6	0.773	18.0	0.709	19.5	3/4"	0.520	1.146	139.92
039-12	12 MM	-	21.4	0.842	18.0	0.709	19.5	3/4"	0.520	1.146	145.75
130-12	-	1/2"	21.3	0.839	18.0	0.709	19.5	3/4"	0.520	1.146	145.75
039-14	14 MM	9/16"	25.0	0.979	21.0	0.827	22.5	7/8"	0.800	1.764	251.75
039-16	16 MM	5/8"	28.2	1.104	24.4	0.961	25.7	1"	1.180	2.601	288.85
039-19	19 MM	3/4"	34.5	1.354	27.5	1.083	28.6	1 1/8"	1.900	4.189	556.50
039-22	22 MM	7/8"	40.3	1.588	32.0	1.260	32.0	1 1/4"	2.800	6.173	699.60
039-26	26 MM	1"	45.8	1.807	34.0	1.339	35.0	1 3/8"	3.950	8.708	901.00

Swage Fork

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Designed to suit most mast chain plates and fixing points

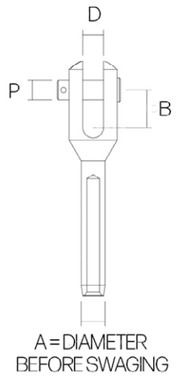

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
035-03	3 MM	1/8"	6.2	0.245	10.0	0.393	6.4	0.252	6.2	1/4"	0.020	0.044	23.32
035-04	4 MM	5/32"	7.4	0.292	14.7	0.580	7.9	0.311	7.7	5/16"	0.060	0.132	25.97
035-05	5 MM	3/16"	9.0	0.354	17.5	0.687	9.5	0.374	9.3	3/8"	0.100	0.220	41.87
135-55	-	7/32"	10.7	0.422	19.0	0.748	11.1	0.437	10.9	7/16"	0.160	0.353	54.59
035-06	6 MM	-	12.4	0.489	19.0	0.748	11.1	0.437	10.9	7/16"	0.160	0.353	54.59
135-06	-	1/4"	12.5	0.494	19.0	0.748	11.1	0.437	10.9	7/16"	0.160	0.353	54.59
035-07	7 MM	9/32"	14.2	0.558	25.1	0.990	11.1	0.437	10.9	7/16"	0.200	0.441	77.91
035-08	8 MM	5/16"	16.1	0.630	25.1	0.990	12.7	0.500	12.6	1/2"	0.340	0.750	82.15
035-10	10 MM	-	17.7	0.698	29.4	1.155	15.9	0.625	15.6	5/8"	0.560	1.235	131.97
135-10	-	3/8"	17.7	0.698	29.4	1.155	15.9	0.625	15.6	5/8"	0.560	1.235	131.97
135-11	-	7/16"	19.6	0.716	33.3	1.312	19.1	0.750	18.5	3/4"	0.900	1.984	350.86
035-12	12 MM	-	21.3	0.839	33.3	1.312	19.1	0.750	18.5	3/4"	0.900	1.984	350.86
135-12	-	1/2"	21.3	0.839	33.3	1.312	19.1	0.750	18.5	3/4"	0.900	1.984	350.86
035-14	14 MM	9/16"	24.9	0.979	38.1	1.500	22.2	0.875	21.5	7/8"	1.600	3.527	496.08
035-16	16 MM	5/8"	28.0	1.104	40.0	1.576	25.4	1.000	25.0	1"	1.700	3.748	605.26
035-19	19 MM	3/4"	34.4	1.354	50.0	1.970	28.6	1.125	28.2	1 1/8"	2.500	5.512	779.63
035-22	22 MM	7/8"	40.3	1.588	60.3	2.375	31.8	1.250	31.5	1 1/4"	3.620	7.981	1,219.00
035-26	26 MM	1"	45.8	1.807	60.3	2.375	35.0	1.375	34.6	1 3/8"	5.000	11.023	1,619.15

Swage Shroud

- Suitable for use with rotary & fixed die swaging machine
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Fits N840 backing plates

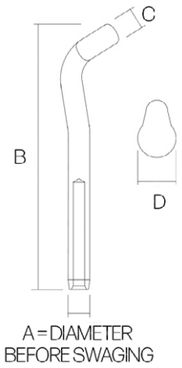

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	C (MM)	C (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
045-04	4 MM	5/32"	7.4	0.292	16.0	0.629	7.5	0.295	16.0	0.630	0.040	0.088	34.29
045-05	5 MM	3/16"	9.0	0.354	19.0	0.748	9.1	0.358	19.0	0.748	0.060	0.132	39.13
045-06	6 MM	-	12.4	0.488	22.0	0.866	12.5	0.492	22.0	0.866	0.140	0.309	46.87
145-06	-	1/4"	12.5	0.494	22.0	0.866	12.5	0.492	22.0	0.866	0.140	0.309	46.87
045-07	7 MM	9/32"	14.2	0.558	28.0	1.102	14.3	0.563	28.0	1.102	0.200	0.441	65.95
045-08	8 MM	5/16"	16.1	0.630	30.0	1.181	16.0	0.629	30.0	1.181	0.280	0.617	97.99
045-10	10 MM	-	17.7	0.698	32.0	1.260	17.8	0.700	32.0	1.260	0.380	0.838	118.29
145-10	-	3/8"	17.7	0.698	32.0	1.260	17.8	0.700	32.0	1.260	0.380	0.838	118.29
045-12	12 MM	-	21.4	0.842	38.0	1.496	21.4	0.842	38.0	1.496	0.660	1.455	219.95
145-12	-	1/2"	21.3	0.839	38.0	1.496	21.4	0.842	38.0	1.496	0.660	1.455	219.95

Swage T

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with Metric and Inch 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter

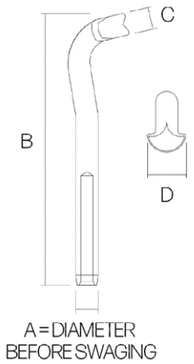

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	C (MM)	C (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
044-03	3 MM	-	6.3	0.248	88.0	3.465	6.3	0.248	15.0	0.591	0.025	0.055	25.07
044-04	4 MM	5/32"	7.5	0.295	101.0	3.976	7.5	0.295	17.1	0.675	0.040	0.088	21.71
044-05	5 MM	3/16"	9.0	0.354	112.0	4.409	9.0	0.354	19.5	0.769	0.060	0.132	25.56
044-06	6 MM	-	12.5	0.492	138.0	5.433	12.6	0.496	27.7	1.089	0.140	0.309	33.05
144-06	-	1/4"	12.5	0.492	138.0	5.433	12.6	0.496	27.7	1.089	0.140	0.309	46.83
044-07	7 MM	9/32"	14.2	0.559	144.0	5.669	14.0	0.551	30.0	1.180	0.180	0.397	44.93
044-08	8 MM	5/16"	16.0	0.630	184.0	7.244	16.0	0.630	34.4	1.353	0.300	0.661	62.84
044-10	10 MM	-	17.8	0.701	208.0	8.189	17.5	0.689	36.4	1.434	0.420	0.926	143.84
144-10	-	3/8"	17.8	0.701	208.0	8.189	17.5	0.689	36.4	1.434	0.420	0.926	175.68

Swage Stemball

- Suitable for use with rotary & fixed die swaging machine
- Manufactured from high specification 316 stainless steel
- Use with 1×19, 7 Strand and Compacted Strand wire rope (IWRC)
- Minimum hole depth 10x wire diameter
- Metric and Inch wire ropes
- Can be used with Stemball Cup (page 68) to bring head size up to fit mast / spreader brackets

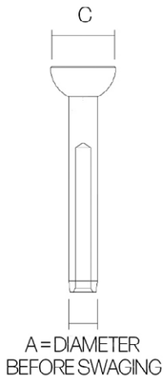

Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	C (MM)	C (Inch)	Weight (KG)	Weight (LB)	Price ($)
042-04	4 MM	5/32"	7.4	0.292	14.6	0.574	0.020	0.044	13.78
042-05Z	5 MM	3/16"	9.0	0.354	14.6	0.574	0.040	0.088	15.37
042-05	5 MM	3/16"	9.0	0.354	18.3	0.720	0.040	0.088	16.96
142-55	-	7/32"	10.7	0.422	21.2	0.835	0.080	0.176	20.14
042-06	6 MM	-	12.4	0.489	21.2	0.835	0.080	0.176	20.14
142-06	-	1/4"	12.5	0.494	21.2	0.835	0.080	0.176	20.14
042-07	7 MM	9/32"	14.2	0.558	21.6	0.850	0.120	0.265	30.74
042-07Z	7 MM	9/32"	14.2	0.558	26.5	1.043	0.130	0.287	33.92
042-08	8 MM	5/16"	16.1	0.630	26.5	1.043	0.140	0.309	40.81
042-10	10 MM	-	17.7	0.698	27.6	1.086	0.240	0.529	65.72
142-10	-	3/8"	17.7	0.698	27.6	1.086	0.240	0.529	65.72
142-11	-	7/16"	19.6	0.776	33.1	1.303	0.340	0.750	108.12
042-12E*	12 MM	-	20.0	0.787	27.9	1.098	0.310	0.683	108.12
042-12	12 MM	-	21.3	0.839	33.1	1.303	0.400	0.882	108.12
142-12	-	1/2"	21.3	0.839	33.1	1.303	0.400	0.882	108.12
042-14	14 MM	9/16"	24.9	0.979	31.8	1.250	0.560	1.235	322.24
042-16	16 MM	5/8"	28.0	1.104	39.4	1.553	0.860	1.896	386.90
042-19	19 MM	3/4"	34.4	1.354	54.0	2.126	1.920	4.233	811.43

*Must be swaged with 12E die only.

Clipper 70 - 2019/20 Race.

Sta-Lok Bronze Turnbuckles

Our ever-popular Sta-Lok Forged Turnbuckles have grown to become one of the leading turnbuckles found on yacht rigging worldwide.

All turnbuckles are forged and machined from high strength bronze alloy and finished in highly polished chromium.

The aerodynamic design of this turnbuckle provides one of the strongest and most elegant bronze turnbuckles on the world market today.

Sta-Lok supply a wide variety of stainless steel threaded end options to suit all rigging layouts.

The following Sta-Lok Bronze Turnbuckle arrangements are available with 1/4" – 3/4" UNF threads and combine our Bronze Turnbuckle body with our stainless steel end fittings.

Please note:

1. The following pages show a series of different Bronze Turnbuckle arrangements. If you do not see your preferred assembly, you can combine the Bronze Body with any of our Threaded End Fittings (page 48) by matching the UNF Threads

'Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.

910 259 3394 | usa@stalok.com | stalok.com

Bronze Body

- The aerodynamic design provides one of the strongest and most elegant bronze turnbuckles on the world market today
- Forged from high strength bronze alloy
- Finished in highly polished chromium



Reference	Thread (UNF)	A (MM)	A (Inch)	Adjustment (MM)	Adjustment (Inch)	Weight (KG)	Weight (LB)	Price ($)
B19-14	1/4"	114.0	4.488	76.0	2.992	0.060	0.132	33.92
B19-516	5/16"	123.0	4.843	83.0	3.268	0.080	0.176	40.28
B19-38	3/8"	133.0	5.236	92.0	3.622	0.120	0.265	51.41
B19-716	7/16"	152.0	5.984	100.0	3.937	0.160	0.353	66.78
B19-12	1/2"	163.0	6.417	104.0	4.094	0.220	0.485	73.67
B19-58	5/8"	195.0	7.677	126.0	4.961	0.400	0.882	112.89
B19-34	3/4"	255.0	10.039	168.0	6.615	0.800	1.764	199.91

Bronze Eye Toggle & Blank

- Supplied with a stainless steel Threaded Eye Toggle (ET18) at one end. See page (51) for toggle dimenions

Reference	Thread (UNF)	Toggle Width (MM)	Toggle Width (Inch)	Toggle Pin (MM)	Toggle Pin (Inch)	Adjustment (MM)	Adjustment (Inch)	Price ($)
B20 ET-34	3/4"	20.0	0.787	18.5	3/4"	168.0	6.615	398.00

910 259 3394 | usa@stalok.com | stalok.com

Bronze U-Strap
Toggle & Blank

- Provided with Forged U Strap toggle (U18) design for longer chain plates. See page 50 for toggle dimenions

Reference	Thread (UNF)	Toggle Width (MM)	Toggle Width (Inch)	Toggle Pin (MM)	Toggle Pin (Inch)	Adjustment (MM)	Adjustment (Inch)	Price ($)
UB20-14	1/4"	7.6	0.299	6.4	1/4"	76.0	2.992	55.55
UB20-516	5/16"	9.2	0.362	7.9	5/16"	83.0	3.268	59.97
UB20-38	3/8"	10.8	0.425	9.5	3/8"	92.0	3.622	72.99
UB20-716	7/16"	12.3	0.484	11.1	7/16"	100.0	3.937	89.61
UB20-12	1/2"	13.0	0.512	12.7	1/2"	104.0	4.094	93.96
UB20-58	5/8"	18.0	0.709	16.0	5/8"	126.0	4.961	184.61

Notes:

910 259 3394 | usa@stalok.com | stalok.com

Supajust Eye Toggle & Sta-Lok.

Sta-Lok Supajust Turnbuckles

Sta-Lok's premium range turnbuckles are machined from high specification solid 316 stainless steel and feature permanently sealed threaded bronze inserts in each end.

The beautiful aesthetics and ingenious performance of the Supajust Turnbuckle carries all the hallmarks of Sta-Lok design and engineering.

Providing distinct advantages over other turnbuckles on the market, the Supajust turnbuckle is designed to ensure superb adjustment, even under high load, without the risk of seizing or galling.

Supajust turnbuckles are available with 3/8" - 1 3/8" UNF threads, with a wide range of end fittings for wire rigging from 5mm (3/16") to 26mm (1").

For the most beautiful boats, choose Sta-Lok.

Please note:

1. The following pages show a series of different Supajust Turnbuckle arrangements. If you do not see your prefferred assembly, you can combine the Supajust Body with any of our Threaded End Fittings (page 48) by matching the UNF Threads.

**Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

Supajust Body

- High specification stainless steel turnbuckle with threaded bronze inserts permanently sealed in each end
- Superb adjustment, even under high load without the risk of seizing or galling
- Positive locking is achieved with traditional split pins



Reference	Thread (UNF)	A (MM)	A (Inch)	Adjustment (MM)	Adjustment (Inch)	Weight (KG)	Weight (LB)	Price ($)
S19-12	1/2"	182.0	7.165	98.0	3.858	0.320	0.705	105.47
S19-58	5/8"	210.0	8.268	108.0	4.252	0.640	1.411	182.31
S19-34	3/4"	248.0	9.764	124.0	4.882	0.880	1.940	269.24
S19-78	7/8"	280.0	11.024	144.0	5.669	1.100	2.425	352.45
S19-100	1"	315.0	12.402	174.0	6.850	1.880	4.145	467.46
S19-118	1 1/8"	365.0	14.370	214.0	8.425	3.020	6.658	607.91
S19-114	1 1/4"	441.0	17.362	260.0	10.236	4.460	9.833	832.10
S19-138	1 3/8"	441.0	17.362	260.0	10.236	5.600	12.346	1,548.66

Supajust
Eye Toggle & Blank

- Supplied with a Threaded Eye Toggle (ET18) at one end
- See page 51 for toggle dimensions

Reference	Thread (UNF)	Toggle Width (MM)	Toggle Width (Inch)	Toggle Pin (MM)	Toggle Pin (Inch)	Adjustment (MM)	Adjustment (Inch)	Price ($)
S20 ET-34	3/4"	20.0	0.787	18.5	3/4"	124.0	4.882	561.80
S20 ET-78	7/8"	25.0	0.984	21.5	7/8"	144.0	5.669	907.36
S20 ET-100	1"	28.0	1.102	25.0	1"	174.0	6.850	1,110.88
S20 ET-118	1 1/8"	31.5	1.240	28.2	1 1/8"	214.0	8.425	1,936.62
S20 ET-114	1 1/4"	35.0	1.378	31.5	1 1/4"	260.0	10.236	2,594.88
S20 ET-138	1 3/8"	38.0	1.496	34.6	1 3/8"	260.0	10.236	3,433.34

Supajust U-Strap
Toggle & Blank

- Provided with Forged U Strap toggle (U18) design for longer chain plates
- See page 50 for toggle dimenions

Reference	Thread (UNF)	Toggle Width (MM)	Toggle Width (Inch)	Toggle Pin (MM)	Toggle Pin (Inch)	Adjustment (MM)	Adjustment (Inch)	Price ($)
US20-12	1/2"	13.0	0.512	12.7	1/2"	98.0	3.858	155.82
US20-58	5/8"	18.0	0.709	16.0	5/8"	108.0	4.252	269.60

Sta-Lok Threaded End Fittings

Need that perfect replacement part or can't quite find a turnbuckle arrangement that matches your requirements?

Sta-Lok threaded ends are machined to the highest standard from high specification 316 stainless steel alloys and are perfectly suited for use with our Stainless Steel, Bronze and Supajust turnbuckle bodies.

Our wide range of threaded ends span from 1/4" to 1 3/8" UNF, providing options to suit all yacht rigging layouts.

Generally speaking, the end fittings are supplied as a Left Hand UNF thread where used as a turnbuckle assembly. Where available, the right hand variants are provided.

Please note:

1. All Threaded End Fittings are supplied with split pins to ensure positive locking with all open body turnbuckle assemblies
2. Should you require any further dimensional details, please make contact with our sales team

**Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

910 259 3394 | usa@stalok.com | stalok.com

Threaded Eye End

- Suitable for all Sta-Lok turnbuckles
- Left hand thread only
- Supplied with split pin



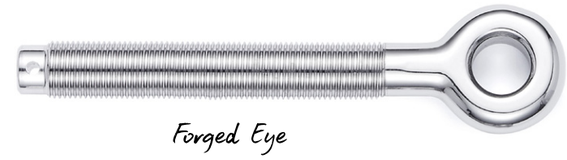

Forged Eye

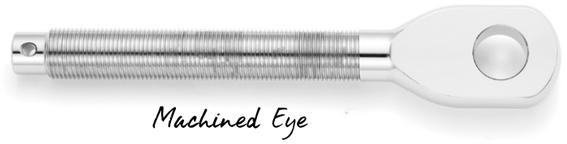

Machined Eye

Reference	Thread (UNF)	C (MM)	C (Inch)	D (MM)	D (Inch)	E (MM)	E (Inch)	H (MM)	H (Inch)	Weight (KG)	Weight (LB)	Price ($)
Forged												
C770-14	1/4"	8.4	0.331	6.0	0.236	47.0	1.850	6.4	1/4"	0.014	0.031	16.86
C770-516	5/16"	9.5	0.374	6.5	0.256	57.0	2.244	8.0	5/16"	0.020	0.044	18.23
C770-38	3/8"	11.0	0.433	7.8	0.307	68.0	2.677	9.5	3/8"	0.040	0.088	23.52
C770-716	7/16"	12.0	0.472	9.3	0.366	75.0	2.953	11.1	7/16"	0.080	0.176	30.70
C770-12	1/2"	13.5	0.531	11.5	0.453	90.0	3.543	12.7	1/2"	0.120	0.264	39.64
C770-58	5/8"	18.3	0.720	13.6	0.535	100.0	3.937	16.0	5/8"	0.240	0.528	63.16
Machined												
C770-34	3/4"	22.5	0.886	18.0	0.709	128.0	5.039	19.5	3/4"	0.520	1.144	94.87
C770-78	7/8"	25.5	1.004	21.0	0.827	140.0	5.512	22.5	7/8"	0.800	1.760	116.60
C770-100	1"	31.9	1.256	24.4	0.961	156.0	6.142	25.4	1"	1.180	2.596	155.82
C770-118	1 1/8"	36.5	1.437	27.5	1.083	180.0	7.087	28.6	1 1/8"	1.720	3.784	358.28
C770-114	1 1/4"	38.1	1.500	30.5	1.201	215.0	8.465	31.8	1 1/4"	2.480	5.456	392.20
C770-138	1 3/8"	42.9	1.689	33.3	1.311	220.0	8.661	35.0	1 3/8"	2.930	6.446	593.60

910 259 3394 | usa@stalok.com | stalok.com

Threaded
U Strap Toggle End

- Full Articulation in two planes
- Manufactured from high specification 316 stainless steel
- Supplied with split pin
- Forged T Design
- Ideal for longer chain plates

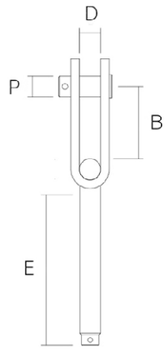

Left Hand Reference	Right Hand Reference	Thread (UNF)	B (MM)	B (Inch)	D (MM)	D (Inch)	E (MM)	E (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
U18-14	U15-14	1/4"	20.0	0.787	7.6	0.299	60.0	2.362	6.4	1/4"	0.040	0.088	30.74
U18-516	U15-516	5/16"	25.0	0.984	9.2	0.362	66.0	2.598	7.9	5/16"	0.060	0.132	32.33
U18-38	U15-38	3/8"	28.0	1.102	10.8	0.425	70.0	2.756	9.5	3/8"	0.100	0.220	33.92
U18-716	U15-716	7/16"	32.0	1.260	12.3	0.484	77.0	3.031	11.1	7/16"	0.160	0.352	42.93
U18-12	U15-12	1/2"	34.0	1.339	13.0	0.512	81.0	3.189	12.7	1/2"	0.260	0.572	50.35
U18-58	U15-58	5/8"	43.0	1.693	18.0	0.709	99.0	3.898	16.0	5/8"	0.460	1.012	87.29

Threaded
Eye Toggle End

- Elegant design
- Manufactured from high specification 316 stainless steel
- Toggle action allows full articulation in two planes
- Ideal for longer chain plates
- Stronger than the wire ropes



Left Hand Reference	Right Hand Reference	Thread (UNF)	B (MM)	B (Inch)	D (MM)	D (Inch)	E (MM)	E (Inch)	F (MM)	F (Inch)	P (MM)	P (Inch)	Price ($)
ET18-34	ET15-34	3/4"	56.0	2.205	20.0	0.787	128.0	5.039	66.0	2.598	18.5	3/4"	292.56
ET18-78	ET15-78	7/8"	63.0	2.480	25.0	0.984	140.0	5.512	78.0	3.071	21.5	7/8"	554.91
ET18-100	ET15-100	1"	67.5	2.657	28.0	1.102	156.0	6.142	82.0	3.228	25.0	1"	643.42
ET18-118	ET15-118	1 1/8"	70.0	2.756	31.5	1.240	180.0	7.087	89.0	3.504	28.2	1 1/8"	1,328.71
ET18-114	ET15-114	1 1/4"	79.0	3.110	35.0	1.378	215.0	8.464	98.0	3.858	31.5	1 1/4"	1,762.78
ET18-138	ET15-138	1 3/8"	98.0	3.858	38.0	1.496	220.0	8.661	110.0	4.331	34.6	1 3/8"	1,884.68

Threaded Shroud

- Manufactured from high specification 316 stainless steel
- Designed to be used with turnbuckle systems
- Fits N840 backing plates
- Left hand thread only
- Supplied with split pin

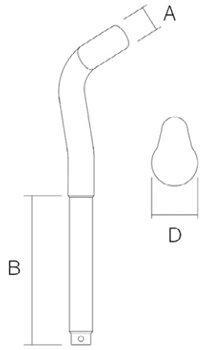

Reference	Thread (UNF)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
188-12	1/2"	14.4	0.566	90.0	3.625	27.0	1.062	0.220	0.484	107.06
188-858	5/8"	16.0	0.628	90.0	3.625	30.0	1.181	0.280	0.616	122.43
188-1058	5/8"	17.5	0.689	100.0	4.000	32.0	1.259	0.400	0.880	179.14
188-34	3/4"	21.4	0.843	120.0	4.750	38.0	1.496	0.720	1.584	262.35

Notes:

Threaded T

- Manufactured from high specification 316 stainless steel
- Design to be used with turnbuckle systems
- Universal fitting - works with a broad selection of backing plates
- Left hand thread only
- Supplied with split pin

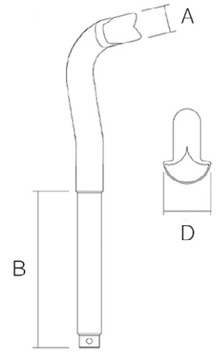

Reference	Thread (UNF)	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
187-14	1/4"	6.2	0.243	48.0	1.889	15.4	0.607	0.020	0.044	48.82
187-516	5/16"	8.8	0.345	57.0	2.244	19.2	0.756	0.060	0.132	55.10
187-38	3/8"	12.3	0.484	62.0	2.440	27.9	1.098	0.120	0.264	59.87
187-716	7/16"	12.3	0.484	67.0	2.638	38.0	1.496	0.140	0.308	64.79
187-12	1/2"	13.8	0.542	78.0	3.071	29.4	1.155	0.180	0.396	65.91
187-58	5/8"	17.4	0.685	100.0	4.000	36.5	1.437	0.400	0.880	159.42

Threaded Stemball



- Suitable for all Sta-Lok turnbuckles
- Manufactured from high specification 316 stainless steel
- If Stemball Cups are required please see Product Reference - 042C, page 68
- Left hand thread only



Reference	Thread (UNF)	C (MM)	C (Inch)	E (MM)	E (Inch)	Weight (KG)	Weight (LB)	Price ($)
186-14	1/4"	14.6	0.575	57.0	2.244	0.020	0.044	18.55
186-516	5/16"	18.0	0.709	63.0	2.480	0.040	0.088	21.20
186-516Z	5/16"	13.2	0.520	63.0	2.480	0.040	0.088	21.20
186-38	3/8"	20.3	0.799	69.0	2.717	0.060	0.132	27.56
186-716	7/16"	20.3	0.799	75.0	2.953	0.100	0.220	33.92
186-12	1/2"	26.0	1.024	80.0	3.150	0.140	0.308	44.52
186-58	5/8"	27.0	1.063	98.0	3.858	0.220	0.484	73.67
186-34	3/4"	28.0	1.102	128.0	5.039	0.380	0.836	111.83
186-78	7/8"	34.0	1.339	140.0	5.512	0.640	1.408	240.62
186-100	1"	39.5	1.556	156.0	6.141	0.980	2.156	337.61
186-118	1 1/8"	54.8	2.156	182.0	7.165	1.540	3.388	576.64

Turnbuckle Extension Bar

- Maximise the adjustment on backstays and cap shrouds by joining two turnbuckles
- Manufactured from high specification 316 stainless steel
- Will assemble with standard open and closed body turnbuckles
- UNF Threads - left hand one end and right hand the other
- Supplied with split pins



Reference	Thread (UNF)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
C280-716	7/16"	75.0	2.953	0.140	0.309	76.85
C280-12	1/2"	81.0	3.189	0.220	0.485	92.75
C280-58	5/8"	100.0	3.937	0.340	0.750	140.45
C280-34	3/4"	135.0	5.315	0.640	1.411	184.97
C280-78	7/8"	140.0	5.512	0.860	1.896	208.82
C280-100	1"	156.0	6.142	1.260	2.778	245.39

Double Jaw Toggle

- Manufactured from high specification 316 stainless steel
- Designed to overcome small additional length requirements on existing cable assemblies
- Use with turnbuckle forks to provide full articulation

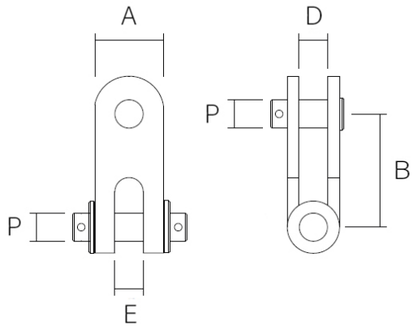

Ref	A (MM)	A (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	E (MM)	E (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
DJT-14	16.0	0.630	20.0	0.787	7.6	0.299	6.7	0.264	6.4	1/4"	0.020	0.044	38.69
DJT-516	19.0	0.748	25.0	0.984	9.2	0.362	8.3	0.327	7.9	5/16"	0.060	0.132	40.28
DJT-38	22.2	0.875	28.0	1.102	10.8	0.425	9.9	0.390	9.5	3/8"	0.080	0.176	41.87
DJT-716	28.6	1.126	32.0	1.260	12.3	0.484	11.5	0.453	11.1	7/16"	0.120	0.264	56.18
DJT-12	32.0	1.260	34.0	1.339	13.0	0.512	13.0	0.512	12.7	1/2"	0.180	0.396	64.66
DJT-58	38.1	1.500	52.0	2.047	18.0	0.709	16.3	0.642	16.0	5/8"	0.360	0.792	93.81
DJT-34	48.0	1.890	81.0	3.189	20.0	0.790	19.5	0.768	18.5	3/4"	0.900	1.980	169.60
DJT-78	60.0	2.362	92.0	3.622	25.0	1.000	23.0	0.906	21.5	7/8"	1.420	3.124	371.00
DJT-100	64.0	2.520	99.0	3.898	28.0	1.130	26.0	1.024	25.0	1"	1.860	4.092	577.70
DJT-118	70.0	2.756	105.0	4.134	31.5	1.250	29.0	1.142	28.2	1 1/8"	2.850	6.270	858.07
DJT-114	80.0	3.150	119.0	4.685	35.0	1.375	34.0	1.339	31.5	1 1/4"	4.020	8.844	1,067.95
DJT-138	90.0	3.543	140.0	5.512	38.0	1.500	35.0	1.378	34.6	1 3/8"	5.430	11.946	1,449.55

Eye & Jaw Bar Toggle

- Manufactured from high specification 316 stainless steel
- Designed to overcome small additional length requirements on existing cable assemblies
- Use with turnbuckle forks to provide full articulation



Ref	A (MM)	A (Inch)	B (MM)	B (Inch)	C (MM)	C (Inch)	D (MM)	D (Inch)	H (MM)	H (Inch)	P (MM)	P (Inch)	Weight (KG)	Weight (LB)	Price ($)
S-14BT	29.1	1.146	13.2	0.520	6.0	0.236	6.4	0.252	6.4	1/4"	6.2	1/4"	0.020	0.044	30.74
S-516BT	38.6	1.520	14.7	0.580	7.4	0.290	7.9	0.311	7.9	5/16"	7.7	5/16"	0.060	0.132	32.86
S-38BT	49.1	1.933	17.5	0.687	8.9	0.349	9.5	0.375	10.0	3/8"	9.3	3/8"	0.080	0.176	41.87
S-716BT	60.4	2.378	21.9	0.861	10.4	0.409	11.1	0.437	11.4	7/16"	10.9	7/16"	0.120	0.265	62.01
S-12BT	74.1	2.917	27.4	1.080	12.0	0.500	12.7	0.500	13.0	1/2"	12.6	1/2"	0.180	0.397	108.65
S-58BT	81.6	3.213	29.2	1.150	13.5	0.531	15.9	0.626	16.0	5/8"	15.6	5/8"	0.360	0.794	137.80
S-34BT	92.2	3.630	33.3	1.311	18.4	0.724	19.1	0.752	19.1	3/4"	18.5	3/4"	0.900	1.984	329.13
S-78BT	110.6	4.354	38.1	1.500	20.0	0.788	22.2	0.874	22.2	7/8"	21.5	7/8"	1.420	3.131	369.94
S-100BT	121.3	4.776	40.0	1.576	23.5	0.925	25.4	1.000	25.4	1"	25.0	1"	1.860	4.101	474.88
S-118BT	148.4	5.843	50.0	1.970	27.0	1.062	28.6	1.125	28.6	1 1/8"	28.2	1 1/8"	2.850	6.283	608.44
S-114BT	174.6	6.875	60.0	2.362	30.7	1.210	32.0	1.260	31.8	1 1/4"	31.5	1 1/4"	4.020	8.863	761.61
S-138BT	185.0	7.282	70.0	2.756	33.3	1.311	35.0	1.378	35.0	1 3/8"	34.6	1 3/8"	5.430	11.971	930.68

Sta-Lok Guard Rail & Life Line Fittings

For your safety and peace of mind. Sta-Lok have designed an extensive range of guard rail and lifeline hardware.

Our wide range of 316 stainless steel hardware is designed to fit 3mm (1/8") to 6mm (1/4") stainless steel wire.

Sta-Lok Guard Rail & Life Line Fittings are designed to fit most pushpit / pulpit designs on both sailing yachts and powerboats alike.

This range of fittings is also perfect for commercial or architectural balustrading infill projects.

Please note:

1. Guard Rail and Life Line Fittings should not be used for yacht standing rigging
2. All fittings are designed for machine swaging

**Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

910 259 3394 | usa@stalok.com | stalok.com

Life Line Stud

- Manufactured from 316 stainless steel
- Machine Swaged
- To be used with life line fittings only
- Available for INCH Wire only
- For use with all Lifeline Turnbuckles and Pelican Hooks

Left Hand Reference	Right Hand Reference	Wire Size (Inch)	Thread (UNF)	Thread Length	Weight (KG)	Weight (LB)	Price ($)
LS-03-14X112L	LS-03-14X112R	1/8"	1/4"	1 1/2"	0.012	0.026	8.48
	LS-04-14X214R	5/32"	1/4"	2 1/4"	0.019	0.042	8.48
	LS-04-516X238R	5/32"	5/16"	2 3/8"	0.027	0.059	9.54
LS-05-14X214L	LS-05-14X214R	3/16"	1/4"	2 1/4"	0.023	0.051	10.60
LS-05-516X238L	LS-05-516X238R	3/16"	5/16"	2 3/8"	0.031	0.068	10.60
	LS-06-516X238R*	1/4"	5/16"	2 3/8"	0.045	0.099	19.08
	LS-06-38X234R*	1/4"	3/8"	2 3/4"	0.055	0.112	19.08

*Use 7/32" swaging dies.

910 259 3394 | usa@stalok.com | stalok.com

Pelican Hook
with Life Line Stud

- Designed specifically for lifelines
- Supplied with lifeline stud and right nut
- Manufactured from 316 stainless steel
- The ultimate life line gate solution
- Available for INCH Wire only
- For machine swaging

Reference	Wire Size (Inch)	Thread (UNF)	Weight (KG)	Weight (LB)	Price ($)
PH LS-03	1/8"	5/16"	0.158	0.348	49.82
PH LS-04	5/32"	5/16"	0.159	0.350	50.35
PH LS-05	3/16"	5/16"	0.160	0.353	53.00
PH LS-06*	1/4"	5/16"	0.161	0.355	57.77

*Use 7/32" swaging dies.

Life Line Turnbuckle
with Stud

- Manufactured from 316 stainless steel
- Open body forged bronze, chromium plated turnbuckle body
- Supplied with Life Line Stud
- Available for INCH Wire only

Reference	Wire Size (Inch)	Thread (UNF)	Pin (MM)	Pin (Inch)	Weight (KG)	Weight (LB)	Price ($)
UB25LL-03	1/8"	1/4"	6.4	1/4"	0.100	0.220	64.03
UB25LL-144	5/32"	1/4"	6.4	1/4"	0.100	0.220	64.03
UB25LL-04	5/32"	5/16"	7.9	5/16"	0.160	0.353	69.51
UB25LL-145	3/16"	1/4"	6.4	1/4"	0.117	0.258	66.15
UB25LL-5165	3/16"	5/16"	7.9	5/16"	0.160	0.353	70.30
UB25LL-06516*	1/4"	5/16"	7.9	5/16"	0.183	0.403	79.05
UB25LL-06*	1/4"	3/8"	9.5	3/8"	0.422	0.930	92.07

*Use 7/32" swaging dies.

Single Gate Eye

- Designed specifically for guard rails and lifelines
- Provided with life line stud (Machine Swaged)
- Available for INCH Wire only

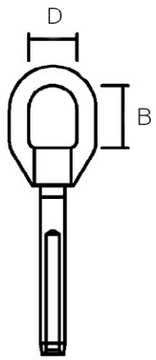

Reference	Wire Size (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
GE1 LS-03	1/8"	19.4	0.764	16.0	0.625	0.020	0.044	19.61
GE1 LS-04	5/32"	19.4	0.764	16.0	0.625	0.022	0.048	21.20
GE1 LS-05	3/16"	19.4	0.764	16.0	0.625	0.025	0.055	22.26

Swivel Gate Eye

- Designed specifically for guard rails and lifelines
- Provided with life line stud (Machine Swaged)
- Available for INCH Wire only

Reference	Wire Size (Inch)	Weight (KG)	Weight (LB)	Price ($)
SGE1 LS-03	1/8"	0.020	0.044	19.61
SGE1 LS-04	5/32"	0.022	0.048	21.20
SGE1 LS-05	3/16"	0.025	0.055	22.26

Interlocking
Gate Eye (Threaded)

- Designed specifically for guard rails and lifelines
- Provided with life line stud (Machine Swaged)
- Available for INCH Wire only

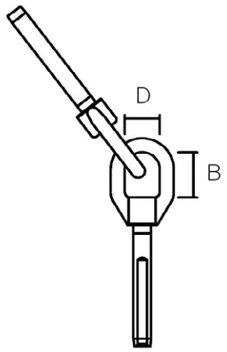

Reference	Wire Size (Inch)	B (MM)	B (Inch)	D (MM)	D (Inch)	Weight (KG)	Weight (LB)	Price ($)
GE2 LS-03	1/8"	19.4	0.764	16.0	0.625	0.240	0.528	39.22
GE2 LS-04	5/32"	19.4	0.764	16.0	0.625	0.260	0.572	42.40
GE2 LS-05	3/16"	19.4	0.764	16.0	0.625	0.300	0.660	43.46

Toggle Jaws

- Manufactured from 316 stainless steel
- Machine Swaged
- Provides full articulation
- Available for INCH Wire only

Reference	Wire Size (Inch)	Pin (Inch)	Weight (KG)	Weight (LB)	Price ($)
132LL-03	1/8"	1/4"	0.017	0.037	14.84
132LL-04	5/32"	1/4"	0.018	0.039	15.90
132LL-05	3/16"	1/4"	0.020	0.044	15.90
132LL-05516	3/16"	5/16"	0.023	0.051	22.79
132LL-06516*	1/4"	5/16"	0.026	0.057	25.44
132LL-06*	1/4"	3/8"	0.030	0.066	25.44

*Use 7/32" swaging dies.

Other Products & Accessories

From Backing plates to ferrules and thimbles.
Find all your additional products and spare components.

Sta-Lok stock a large range of rigging hardware and replacement parts.

We carry a complementary range of British & Din Standard Copper Ferrules & Stainless Steel Thimbles, perfect for making hard eyes and loops.

Please note:

1. All products are supplied as singles unless a packet quantity is listed.

**Many elements, including usage, environment and standard of maintenance can affect the lifetime of your rigging. All fittings should be inspected, checked and maintained regularly.*

Stemball Cup

- Manufactured from high specification 316 stainless steel
- Used to fit Stemball fittings into spreader bracket
- One or two Stemball cups may be required to bring the head size up to fit the mast/spreader brackets



Reference	Wire Size (MM)	Wire Size (Inch)	A (MM)	A (Inch)	B (MM)	B (Inch)	Weight (KG)	Weight (LB)	Price ($)
042C-4	4 MM	5/32"	9.0	0.354	26.0	1.024	0.016	0.035	10.07
042C-5	5 MM	3/16"	11.2	0.441	26.0	1.024	0.014	0.031	15.37
042C-6/7	6 MM & 7 MM	7/32", 1/4", 9/32"	16.0	0.630	26.0	1.024	0.016	0.035	15.90
042C-8/10	8 MM & 10 MM	5/16" & 3/8"	20.0	0.787	34.0	1.339	0.017	0.037	17.49

Notes:

Sta-Lok Fork Pin

- Manufactured from 316 Stainless Steel
- Replacement pin for Sta-Lok Fork, product reference (034)



Reference	A (MM)	A (Inch)	P (MM)	P (Inch)	Pack (Quantity)	Weight per pack (KG)	Weight per pack (LB)	Price ($)
037-03	15.5	0.610	5.0	3/16"	5	0.100	0.220	45.20
037-04	17.5	0.689	6.4	1/4"	5	0.200	0.441	45.20
037-05	20.6	0.811	8.0	5/16"	5	0.300	0.661	57.88
037-06	27.0	1.063	10.9	7/16"	5	0.600	1.323	83.31
037-07	27.0	1.063	10.9	7/16"	5	0.600	1.323	83.31
037-08	34.1	1.343	12.6	1/2"	2	0.128	0.282	36.81
037-10	37.3	1.469	15.6	5/8"	2	0.280	0.617	45.07
037-12	47.6	1.874	18.5	3/4"	1	0.120	0.265	43.99
037-14	50.8	2.000	21.5	7/8"	1	0.160	0.353	114.19
037-16	54.0	2.126	21.5	7/8"	1	0.180	0.397	120.74
037-19	66.7	2.626	27.0	1 1/16"	1	0.392	0.864	154.57
037-22	80.1	3.187	31.5	1 1/4"	1	0.680	1.500	196.41
037-26	96.0	3.781	34.6	1 3/8"	1	0.890	1.962	223.47

Strap Toggle Pin

- Manufactured from 316 Stainless Steel
- Replacement pin for Strap Toggles, product reference (038, B15, B18)



Reference	A (MM)	A (Inch)	P (MM)	P (Inch)	Pack (Quantity)	Weight per pack (KG)	Weight per pack (LB)	Price ($)
057-03	12.7	0.500	6.4	1/4"	5	0.125	0.276	37.97
057-04	15.5	0.610	7.9	5/16"	5	0.225	0.496	33.41
057-05	17.5	0.689	9.5	3/8"	5	0.400	0.882	35.40
057-06	20.2	0.795	11.1	7/16"	5	0.550	1.213	46.28
057-08	23.8	0.937	12.7	1/2"	2	0.128	0.282	18.52
057-10	31.0	1.220	16.0	5/8"	2	0.240	0.529	24.78
057-12	38.1	1.500	18.5	3/4"	1	0.101	0.223	20.36
057-14	42.0	1.654	21.5	7/8"	1	0.160	0.353	28.73

Terms & Conditions

1. DEFINITIONS

In these Terms & Conditions, unless the context otherwise requires:
"The Company" means Sta-Lok Terminals Ltd of The Forge, Mistley Heath, Manningtree, Essex CO11 2QH.
"The Customer" means the person, firm or company to whom the Company supplies Goods under the Contract.
"The Contract" means the contract entered into between the Company and the Customer in relation to the Goods supplied, and
"The Goods" means the goods which the company is to supply to the Customer under the Contract.

2. GENERAL

2.1 The Company supplies the Goods on these Terms & Conditions only. Accordingly these Terms and Conditions shall apply to all orders for the Goods which are received from the Customer and (save as shall have been expressly agreed in writing by a director of the Company) shall prevail over any conditions of contract which the Customer may seek to impose. No variation of, or addition to, these Terms & Conditions and no representations about the Goods will be binding on the Company unless made in writing and signed by a director of the Company.
2.2 Any reference in these Terms & Conditions to any provision of an Act of Parliament or statutory instrument shall be construed as a reference to that provision as amended, re-enacted or extended from time to time.
2.3 The headings in these Terms & Conditions are set out for convenience only and shall have no effect on the interpretation of the individual clauses.

3. THE SCOPE OF CONTRACT

3.1 The Contract does not become binding upon the Company until the Company has issued a written acceptance of the Customer's order.
3.2 The Company's obligations under the Contract shall be limited to supplying the Goods contemplated by the Customer's order together with any variations thereof and additions thereto, which may subsequently be agreed. The Customer must give the Company reasonable notice of any variations and additions that are required.

4. PRICE

4.1 Subject as hereinafter provided, the price payable by the Customer for the Goods shall reflect the Company's price list from time to time in force in relation to the Customer except where the Company has issued a written quotation to the Customer, in which case the price or prices referred to in that quotation shall prevail,
4.2 The Company does however reserve the right to increase the price payable in order to reflect any agreed variations or additions to the Customer's requirements and any increases in production costs, which may be incurred by the Company between the date of the Customer's order and the date of despatch. In no circumstances shall any increase in the Contract price entitle the Customer to cancel its order or to repudiate the Contract but the Customer shall be entitled to receive notification of any such increases as soon as possible after their occurrence.
4.3 Unless expressly included in any quote given to the Customer, the Company shall be entitled to recover from the Customer as an additional item at cost all transportation, insurance, storage and other associated costs and charges which are incurred by the Company in delivering the Goods in accordance with the Customer's order, including any additional costs and charges which may be incurred by the Company in the event of the Customer for any reason failing or being unable to accept delivery of the Goods when tendered or causing despatch or delivery to be withheld through the non-payment of any sum due to the Company.
4.4 Unless otherwise indicated, all prices listed or quoted are exclusive of any applicable Value Added or other relevant sales taxes, which the Company reserves the right to levy at the prevailing rate on all amounts actually charged to the Customer.

5. PAYMENT

5.1 Payment of sums due under the Contract shall be made by the Customer nett within 30 days of invoice, unless the Company has requested alternative terms of payment in which case payment should be made on the terms then requested. The Company shall be entitled to invoice the Customer for each consignment despatched at any time on or after the date of despatch.
5.2 In the event that payment is not made by the due date, the Company shall be entitled to charge the Customer interest on any overdue amounts at the rate of 2% per month (or at such other rate as maybe advised by the Company from time to time) for each month or part month during which the said amounts are to remain overdue (both before and after any judgement).
5.3 Payment on or before the due date is of the essence of the Contract. Accordingly the Company shall upon notice to the Customer be entitled to withhold delivery and/or suspend the performance of the Contract generally if at the time of the notice payment of any amount stated on any of the Company's invoices (whether related to the Contract or not) is then overdue. If the Customer fails within 14 days of notice to settle the amount outstanding under the said invoices, then the Company shall be entitled to terminate the Contract without further notice.
5.4 The Customer shall not be entitled to retain, deduct or defer any sums whatsoever due to the Company under the Contract on account of any dispute cross claim or set off which it might have with the Company or with any company in the same group of companies as the Company.

6. DELIVERY

6.1 The performance of the Contract is subject to availability, and therefore in the event that it is unable to supply any specific Goods or any specific quantities of Goods, the Company reserves the right to provide suitable alternatives or suitable alternative quantities, and to make such reasonable adjustments (upwards or downwards) to the Contract price as are necessary to reflect the change. Such alterations shall not entitle the Customer to repudiate the Contract.
6.2 Unless otherwise indicated, and subject to the provisions of clause 4.3, the Company shall be responsible for arranging delivery of Goods to the Customer's premises. Accordingly the Customer undertakes to provide a safe and convenient access for the Company's delivery vehicles (or those of its agents) at each delivery point together with safe facilities for the loading and unloading of the Goods (including any assistance in loading and unloading that may be required). The placing of an order by the Customer shall be deemed to constitute authority for the Company's delivery vehicles (or those of its agents) to enter the Customer's premises where necessary and it shall be the responsibility of the Customer to supervise the safe discharge of each load.
6.3 Any time estimates or delivery dates given by the Company shall be by way of guidance only and shall not be of the essence of the Contract. Accordingly any delay in delivery shall not entitle the Customer to repudiate the Contract and the Company shall not be liable to the Customer (either in contract or tort) for any loss or damage whatsoever (including consequential losses, loss of profit and other losses of a similar nature) which may be suffered or sustained by it as a result of any failure by the Company to adhere to any time estimate or delivery date given.
6.4 If for any reason the Company still fails to deliver the Goods within any reasonable time limit specified by the Customer at any time after the Customer has purported to make time of the essence of the Contract, and a Court or any other arbiter subsequently finds the Company to be responsible for any loss or damage suffered by the Customer as a result thereof, the Company's liability therefore (both in contract and tort) shall be strictly limited to the excess (if any) of the cost to the Customer (over and above the Contract price) of obtaining similar goods (in the cheapest available market) to replace those not delivered.
6.5 Without prejudice to any of the above the Company shall be entitled to deliver the Goods by single delivery or instalment at its option and, whenever the Goods are delivered, or are to be delivered, by instalments, the Company shall be entitled to treat each delivery as a separate contract. Accordingly any failure by the Company to make one delivery (in whole or in part) shall not entitle the Customer to terminate any other contract or refuse any other deliveries.

7. OWNERSHIP AND RISK

7.1 Unless otherwise indicated, the risk of damage to the Goods shall pass to the Customer upon delivery to the Customer or its agents
7.2 However, title to the goods shall not pass to the Customer until the Company has received payment in full of all sums due from the Customer under the Contract together with any interest accrued thereon and other charges. In the meantime, the Company shall retain full legal and beneficial title to the Goods and the Customer shall (a) hold the goods in a fiduciary capacity as the Company's bailee free from any charge, lien or other encumbrance, (b) shall keep the Goods fully insured with a reputable insurer, and (c) shall store the Goods separately in such a way that they can be clearly identified as the Company's property. In this period the Company shall be entitled to recover possession of the Goods (or any of them) at any time and for any reason whatsoever and shall be entitled without restriction to lawfully enter upon the premises to the customer for the purposes of removing the Goods. The customer shall pay all costs and expenses incurred by the Company in exercising this right.
7.3 If, pending the passing title in the Goods, the Customer sells or otherwise disposes of the Goods in such manner as to pass valid title to a third party, the Customer shall hold the full proceeds of such a sale (and pending payment the right to receive the proceeds of such a sale) on trust for the Company in a separate and identifiable bank account.

During the same period, the Customer will pay the said proceeds to the Company on demand notwithstanding that any period of credit extended to the Customer may not have expired. In addition the Customer agrees that it will assign to the Company upon the Company's request all of its rights (under such a contract of sale) against any subsequent purchaser of the Goods.
7.4 Notwithsstanding that title may not have passed to the Customer, the Company may maintain an action for the price of the Goods supplied. The Customer acknowledges that nothing in clauses 7.2 and 7.3 above confers any right upon the Customer to return or reject the Goods supplied or to refuse, defer or delay payment for them.

8. LIEN

8.1 The Company shall (without prejudice to any other remedy available to it) have in respect of all unpaid debts and other sums due from the Customer under the Contract a general lien on any goods and property whatsoever in is possession (whether in relation to the contract or otherwise) which are or intended to become the property of the Customer.
8.2 Pursuant to that lien, the Company shall be entitled upon fourteen days written notice to the Customer to sell any goods or property so held upon such items as it thinks fit, and to keep the proceeds of the sale thereof in diminution of the debts, the other sums due and all costs and expenses incurred in or about effecting the sale.

9. CANCELLATION OF ORDERS

Orders for Goods which have been accepted by the Company may not be cancelled or suspended without the Company's prior written consent which consent the Company may give or withhold in its absolute discretion.

10. INVALIDITY OF ANY CONTRACTUAL TERM

If any clause or sub-clause or part thereof contained in these Terms and Conditions is held by any court or other competent authority to be invalid or unenforceable in whole or in part, the validity of the remainder of the clause or sub-clause and of the remaining clauses and sub-clauses of these Terms and Conditions shall not be affected thereby.

11. WAIVER

No waiver by the Company of any particular default or breach of Contract by the Customer shall be considered as a waiver of any subsequent default or breach of the same or of any other provision of the Contract.

12. ASSIGNMENT

The Customer may not assign the benefit or burden of the Contract without the written consent of the Company which the Company may give or withhold in its absolute discretion.

13. FORCE MAJEURE

In the event that the normal course of the Contract is frustrated, prevented, interrupted, hindered, delayed or rendered unduly expensive in any way whatsoever through war, rebellion, civil commotion, strike, lock-out or industrial dispute, fire, explosion, earthquake, act of God, flood, drought or bad weather, the unavailability or late delivery of supplies, the inability to secure labour or by any other cause whatsoever beyond the Company's control, the Company shall promptly give notice thereof to the Customer and shall have the right to cancel the Contract or defer its performance for as long as such force majeure shall continue.

14. PROPER LAW

The construction validity and performance of the Contract shall be governed by English Law and all disputes or questions which may arise out of, or in connection with, or in relation to the Contract shall be decided by the English Courts.

15. WARRANTIES AND LIMITATION OF LIABILITY

15.1 All Goods are sold on the basis that the Customer is neither a consumer nor deals as a consumer within the meaning of the Unfair Contract Terms Act 1977. Where the Goods are supplied under a consumer transaction, the statutory rights of the Customer shall be unaffected by anything set out in these Terms and Conditions.
15.2 The Company hereby warrants that the Goods are at the date of delivery free from any material defect in workmanship and will remain free from any material defect in workmanship and materials for a period of 2 years from the date of delivery to the Customer and correspond with any agreed written specification but the Company's liabilities under this warranty shall be limited to making available free of charge the labour and materials required to make good any such defects or (at the Company's option) replacing any defective Goods. The Company's liability under this warranty is also subject to the following conditions and limitations:
a. The Company will not accept any liability for any defective or faulty Goods supplied, unless the Customer gives the Company written notice of the defect or defects in question within 90 days of delivery (save where the defect or defects are of a nature which would not normally be apparent upon a reasonable inspection, in which case the notice of defect or defects must be given within 14 days of discovering the same);
b. The Company will not accept any liability for goods damaged in transit unless the Customer gives it written notice of the damage within 5 working days of delivery;
c. The Goods having been properly stored and used by the Customer prior to the defect occurring;
d. The Company will not accept any liability whatsoever in relation to any goods which have been fitted incorrectly or subjected to any incorrect, abnormal or improper load use accident or unauthorised modification, repair or application, whether by the Customer or any third party;
e. The goods having been used in accordance with the Company's instructions whether written or oral;
f. The Goods having been subjected to proper and adequate inspection after installation and properly maintained in accordance with the Company's guidelines;
g. The Goods having been returned at the Company's request but at the Customer's expense for inspection; and
h. The Company having received the total price for the Goods by the due date for payment. Without
prejudice to the provisions of clause 7.1 above, all goods which are returned to or replaced by the Company, shall become the property of the Company.
15.3 The warranty contained in clause 15.2 is given in lieu of and shall be deemed to exclude all other warranties and conditions whether express or implied whether arising by common law, statute or otherwise to the fullest extent permitted by law, other than that relating to title to the Goods. The warranty contained in clause 15.2 does not extend to parts, materials or equipment not manufactured by the Company, in respect of which the Customer shall only be entitled to the benefit of any such warranty or guarantee as is given by the manufacturer to the Company.
The warranty contained in clause 15.2 does not extend to cosmetic defects occurring after supply. In corrosive atmospheres stainless steel parts may show discolouration.
15.4 Save as provided under the Unfair Contract Terms Act 1977 and as mentioned in this clause 15, all
liability (both in contract and in tort) of the Company for any consequential losses, loss of profit and other losses of a similar nature which may be suffered or sustained by the Customer in connection with the contract and/or the quality or performance of the goods supplied there under is excluded to the fullest extent permitted by law.
15.5 All Goods are sold on the basis that the Customer has satisfied itself as to the suitability of the Goods for use or resale in accordance with its own specialised knowledge and skill and the Customer acknowledges that it has not placed any reliance upon the skill or judgement of the Company or of any of the Company's servants or agents. In the case of export orders, it is also the Customer's responsibility to ensure that the Goods comply with any legislation or regulations relating to their use in the country in question and the Company shall not therefore incur any liability whatever in respect thereof. The Company shall not be under any liability in respect of any defect arising from fair wear and tear, wilful damage or arising from any drawing, design or specification supplied by the Customer.
15.6 The Customer agrees to indemnify the Company against all claims relating to Goods sold to the Customer in respect of any loss damage or expense, whether direct or consequential, sustained by any third party save only in respect of death or personal injury caused by the negligence of the Company or any of its employees, agents or sub-contractors.
15.7 Notwithstanding the above provisions, the Company does not exclude or restrict its liability for death or personal injury caused by its negligence or that of its employees, agents or subcontractors.
15.8 Some states do not permit some of the limitations or exclusions noted above, so some of them may not apply to the Customer.

16. RETURNS

16.1 Rigging hardware manufactured by Sta-Lok is guaranteed at the time of shipment, to be free of defects in material and craftsmanship and only when used for the purpose intended.
16.2 Returned goods will not be accepted without notification and prior approval by Sta-Lok Terminals Ltd.
16.3 All returns must be prepaid and in a re-saleable condition before a credit can be issued. We reserve the right to make a re-stocking charge of 25%.
16.4 Items that have been manufactured to specific requirements, including but not limited too, Wire Rope Assemblies and Tie Rod Assemblies cannot be refunded.

STA-LOK®

The Forge, Mistley Heath,
Manningtree, Essex CO11 2QH
England

Contact us:

+44 (0) 1206 390773
enquiries@stalok.com

USA Office:

+1 910 259 3394
usa@stalok.com

Follow us on:

STA-LOK®

stalok.com