


Cross Coupler

Sta-Lok's stainless steel cross coupler has been designed for use where tie rod cross in the same plane, providing angular alignment from 30 degrees. By reducing the number of fork connectors required, they are a stylish and cost-effective solution for cross bracing without a central disc.

- For use of intersecting rods
- Eliminates rod deflection
- Variable angle alignment
- Conical locking nuts provide a clean line between the rod and coupler fitting
- Available with left and right hand Metric or UNF machined internal threads
- Available in Satin (standard) or Polished Finish to match the required rod finish

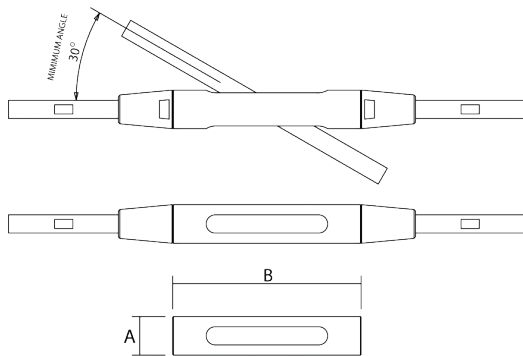

Reference	Thread		A		B	
	Metric	UNF	MM	Inch	KN	KIPS
CC-M10	M10		20.0	0.820	104.0	4.262
CC-38		3/8	20.0	0.820	104.0	4.262
CC-M12	M12		25.4	1.041	124.0	5.082
CC-12		1/2	25.4	1.041	124.0	5.082
CC-M16	M16		31.0	1.270	168.0	6.885
CC-58		5/8	31.0	1.270	168.0	6.885
CC-M20	M20		38.0	1.557	193.0	7.910
CC-34		3/4	38.0	1.557	193.0	7.910
CC-M22	M22		44.0	1.803	217.0	8.893
CC-78		7/8	44.0	1.803	217.0	8.893
CC-M24	M24		47.0	1.926	245.0	10.041
CC-100		1	47.0	1.926	245.0	10.041
CC-M27	M27		53.0	2.172	268.0	10.984
CC-118		1 1/8	53.0	2.172	268.0	10.984
CC-M30	M30		57.0	2.336	287.0	11.762
CC-114		1 1/4	57.0	2.336	287.0	11.762
CC-M36	M36		63.0	2.582	342.0	14.016