

# NEW FOR 2013 FROM

# STA-LOK®

**TRUSTED BY RIGGERS WORLDWIDE**

**New termination for Stemball - mast, spreader and tip cups.**

### Sta-Lok Self Fit Terminals

- Stronger than the wire
- Easy installation with simple hand tools
- Fits inch and metric wire
- 1x19, 7x19 and compacted strand
- 7/32" (6mm) - 3/8" (10mm)



*Stemball Cups are not included, please order separately to suit your requirements*

## STA-LOK STEMBALL TERMINAL

Cat Ref	Wire		A		C		Stemball Cup Ref	B	
	mm	Inch	mm	Inch	mm	Inch		mm	Inch
046-06	6	-	96	-	21.2	-	042C-6-7	26	-
146-55	-	7/32	-	3.779	-	0.835	142C-6-7	-	1.023
146-06	-	1/4	-	3.973	-	0.835	142C-6-7	-	1.023
046-07	7	9/32	110	4.330	21.6	0.850	042C-6-7	26	1.023
046-08	8	5/16	125	4.921	26.5	1.043	042C-8-10	34	1.338
046-10	10	-	168	-	27.6	-	042C-8-10	34	-
146-10	-	3/8	-	6.614	-	1.086	142C-8-10	-	1.338


Sta-Lok terminals are supplied with 1x19 wedges unless specified.

For 7 strand wire use order reference 846 for inch wire and 746 for metric wire.

For compacted wire use order reference D046.

Stemball Cup Ref	B		
	mm	Inch	
042C/142C-6-7	-	26	1.023
042C/142C-6-7 + 042C/142C-8-10	34	1.338	
042C/142C-8-10	-	34	1.338

One or two stemball cups may be required to bring the head size up to fit the mast/spreader bracket.

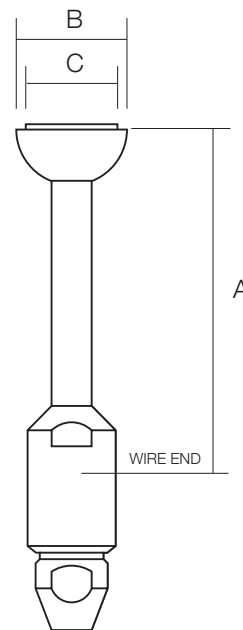

### Sta-Lok Terminals Limited

The Forge, Mistley Heath  
Manningtree, Essex CO11 2QH England

Talk to our sales team on **+44 (0)1206 390777**  
or contact us by fax on **+44 (0)1206 395286**  
Email orders can be made at **orders@stalok.com**  
or order online at **www.stalok.com**

## PRODUCT UPDATE 2013